


Environmental Certification Scheme

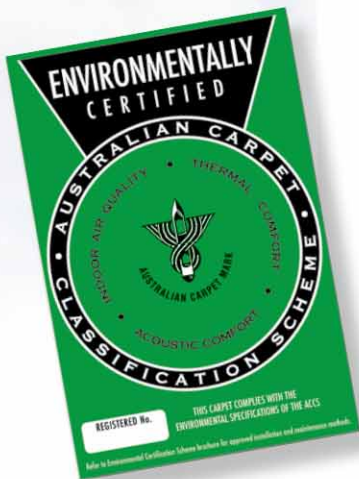

Carpet Name: **INTERFACE DUO**

Licensee: **INTERFACE**
Licence Number: **1016**
Label Number: **14119**

Certification Approved: **29/10/2014**

Level: **4**

ACCS Contract Grading: **CEHD 4***
ACCS Residential Grading: **NONE**
Suitable for Stairs: **Yes**

Date Printed: **25/11/2020**

Allan Firth



Allan Firth
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560
Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

Carpet Details:**Company: INTERFACE****Label No: 14119****Licence No: 1016****Office No: 5940****Names:**

INTERFACE DUO

Details:

Awarded Res Grade: NONE
 Awarded Con Grade: CEHD 4*
 Registered On: 20/06/2014
 Active: Yes
 Date In-Active:
 Manufacture Method: Tufted
 Twist Set: N/A
 Dyeing Method: Melt Dyed
 #Colours/Designs: 12/
 Backing Type: OTHER
 Felted: N/A
 Spinning System: BCF
 Insect Resist Agent: N/A
 Filament: 21.3
 Master Product:

Test Results:

Pile Mass g/m² (oz/yd²): 848 (25.0)
 SPM g/m² (oz/yd²): 662.9 (19.6)
 Stated Pile Height (mm): 4.8
 Minimum Pile Height (mm): 0.0
 Maximum Pile Height (mm): 0.0
 Dynamic Loading Loss (%): 19.5
 Static Loading Loss (%): 12.2
 Tex (g/1000m): 300
 Measured Pile Thickness (mm): 4.8
 Machine Gauge (Tufts/dm): 50.4
 Meas Tufts Perp to Selvedge: 52.0
 Meas Tufts Para to Selvedge: 36.0
 Treated For Soiling Resistance: Yes
 Soil Resist Inhibitor: Yes
 Stain Resist Inhibitor: Yes

Hexapod Scores:

	Texture		Colour		Thickness	
	WA		WA		(mm)	(%)
1500:	4.0	0.0	4.0	0.0	0.3	6.3
8000:	4.0	0.0	4.0	0.0	0.9	18.8

Quality Assurance Test: 27/10/2020

Cut Pile (%): 50

Loop Pile (%): 50

Panel Assessment Contract: 13

Panel Assessment Residential: 13

Suitable For Stairs: Yes

Tile: Yes SheetGoods: No

Fibre Signature: NBA:100

ACCS Test:

	Con	Res	Max
SPM/PH Ratio:	16	16	16
Volume Density:	12.4	12.4	20
Tuft Density:	9	9	9
Dyn Load:	4	4	5
Stat Load:	4	4	5
Soiling Prop:	14	14	16
Abrasion Res:	10	10	10
Sub Total:	69.4	69.4	81
Panel Assess:	13	13	19
Total:	82.4	82.4	100
Calc Residential Grade:	REHD2		6*
Calc Contract Grade:	CHD		3*

Calculations

Pile Height(mm): 6.1
 Tuft Density(per dm²): 1872.0
 GSPM(g/m²): 432.5
 GSPM (abrasive) (g/m²): 275.0
 Soiling Propensity: 12.0 +2.0

OAF Values

OAF: 4.2
 Calc Density (+-5%): 0.13 0.138 0.15
 Base Fibre: NYLON
 Benchmarks:
 RHD1 0 RHD2 3.5
 REHD1 3.5 REHD2 3.5

Environmental Classification:

ECS: Yes

Level: 4

	Calc	B/M	P/F
Acoustic:	4.8	3	PASS
Thermal:	34.8	15	PASS
VOC:			
TVOC	50		

Notes:

20/6/14 Nylon 6. Submitted by J Azar. 25/6/14 VOC report on Recycled Nylon required.
 Panel awarded CHD(S) 3*. 6/10/14 given INTERIM ECS Level 4a. 29/10/14 Panel certified
 ECS Level 4. 20/11/2020 QA data entered, SPM increased. 25/11/2020 Panel awarded
 CEHD(S) 4* and ECS Level 4.