


# Environmental Certification Scheme

Carpet Name: **URBAN RETREAT UR303 COLLECTION**

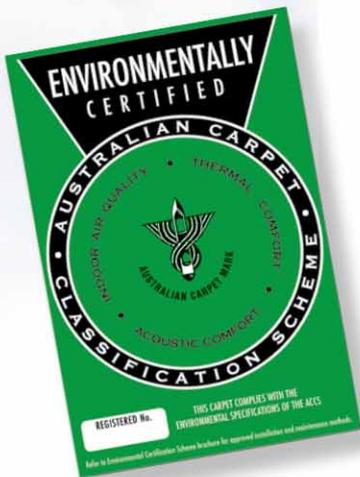

Licensee: **INTERFACE**  
Licence Number: **1016**  
Label Number: **13017**

Certification Approved: **30/06/2014**

Level: **4**

ACCS Contract Grading: **CEHD 4\***  
ACCS Residential Grading: **NONE**  
Suitable for Stairs: **Yes**

Date Printed: **25/11/2020**

*Allan Firth*



**Allan Firth**  
Secretary ACCS



**Administered by the Carpet Institute of Australia Limited** ABN 11 006 829 303  
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560  
Email: [info@carpetoz.com.au](mailto:info@carpetoz.com.au) • [www.carpetinstitute.com.au](http://www.carpetinstitute.com.au)

This certificate remains the property of the Carpet Institute of Australia Limited.

**Carpet Details:**

**Company: INTERFACE**

**Label No: 13017**

**Licence No: 1016**

**Office No: 5598**

**Names:**

URBAN RETREAT UR303 COLLECT...

**Details:**

Awarded Res Grade: NONE  
 Awarded Con Grade: CEHD 4\*  
 Registered On: 29/01/2013  
 Active: Yes  
 Date In-Active: 29/01/2013  
 Manufacture Method: Tufted  
 Twist Set: N/A  
 Dyeing Method: Melt Dyed  
 #Colours/Designs: 12/  
 Backing Type: OTHER  
 Felted: N/A  
 Spinning System: BCF  
 Insect Resist Agent: N/A  
 Filament: 21.3  
 Master Product:

**Test Results:**

Pile Mass g/m<sup>2</sup> (oz/yd<sup>2</sup>): 780 (23.0)  
 SPM g/m<sup>2</sup> (oz/yd<sup>2</sup>): 534.4 (15.8)  
 Stated Pile Height (mm): 4.0  
 Minimum Pile Height (mm): 0.0  
 Maximum Pile Height (mm): 0.0  
 Dynamic Loading Loss (%): 0.0  
 Static Loading Loss (%): 0.0  
 Tex (g/1000m): 300  
 Measured Pile Thickness (mm): 4.0  
 Machine Gauge (Tufts/dm): 39.4  
 Meas Tufts Perp to Selvedge: 40.0  
 Meas Tufts Para to Selvedge: 43.0  
 Treated For Soiling Resistance: Yes  
 Soil Resist Inhibitor: Yes  
 Stain Resist Inhibitor: Yes

**Hexapod Scores:**

	Texture		Colour		Thickness	
	WA		WA		(mm)	(%)
1500:	4.0	0.0	3.5	0.0	0.3	7.5
8000:	4.0	0.0	3.0	0.0	0.7	17.5

Quality Assurance Test: 20/11/2020

Cut Pile (%): 0  
 Loop Pile (%): 100  
 Panel Assessment Contract: 12  
 Panel Assessment Residential: 12  
 Suitable For Stairs: Yes  
 Tile: Yes SheetGoods: No  
 Fibre Signature: NBA:100

**ACCS Test:**

	Con	Res	Max
SPM/PH Ratio:	15.7	16	16
Volume Density:	13.6	13.6	20
Tuft Density:	8.5	8.5	9
Dyn Load:	3.9	3.9	5
Stat Load:	4.1	4.1	5
Soiling Prop:	14	14	16
Abrasion Res:	10	10	10
Sub Total:	69.8	70.1	81
Panel Assess:	12	12	19
Total:	81.8	82.1	100
Calc Residential Grade:	REHD2		6*
Calc Contract Grade:	CHD		3*

**Calculations**

Pile Height(mm): 5.3  
 Tuft Density(per dm<sup>2</sup>): 1720.0  
 GSPM(g/m<sup>2</sup>): 415.0  
 GSPM (abrasive) (g/m<sup>2</sup>): 275.0  
 Soiling Propensity: 12.0 +2.0

**OAF Values**

OAF: 4.2  
 Calc Density (+-5%): 0.13 0.134 0.14  
 Base Fibre: NYLON  
 Benchmarks:  
 RHD1 0 RHD2 3.5  
 REHD1 3.5 REHD2 3.5

**Environmental Classification:**

ECS: Yes  
 Level: 4

	Calc	B/M	P/F
Acoustic:	4	3	PASS
Thermal:	29.9	15	PASS
VOC:			
TVOC	159		

**Notes:**

23/6/14 100% Recycled Nylon 6. Re-submission by J Azar. 25/6/14 VOC on Recycled Nylon required. Panel awarded CHD(S) 3\*. 30/6/14 VOC report #188 on Recycled Nylon 6 submitted. Certified to ECS Level 4. 20/11/2020 QA data entered. SPM increased. 25/11/2020 Panel awarded CEHD(S) 4\* and ECS Level 4.