


Environmental Certification Scheme

Carpet Name: **OPEN AIR 403 TRANSITION**

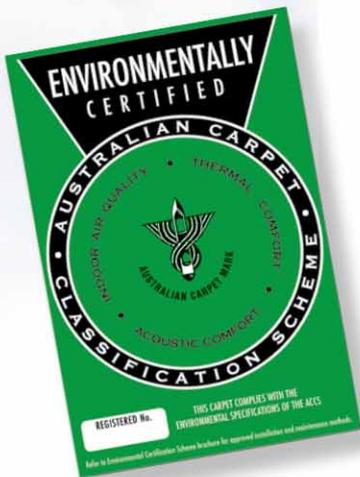

Licensee: **INTERFACE**
Licence Number: **1016**
Label Number: **22155**

Certification Approved: **24/01/2022**

Level: **4**

ACCS Contract Grading: **CEHD 4***
ACCS Residential Grading: **NONE**
Suitable for Stairs: **Yes**

Date Printed: **1/02/2022**

Allan Firth



Allan Firth
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560
Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

Carpet Details:**Company: INTERFACE****Label No: 22155****Licence No: 1016****Office No: 7231****Names:**

OPEN AIR 403 TRANSITION

Details:

Awarded Res Grade: NONE
 Awarded Con Grade: CEHD 4*
 Registered On: 24/01/2022
 Active: Yes
 Date In-Active:
 Manufacture Method: Tufted
 Twist Set: N/A
 Dyeing Method: Melt Dyed
 #Colours/Designs: 8/1
 Backing Type: Latex
 Felted: N/A
 Spinning System: BCF
 Insect Resist Agent: N/A
 Filament: 21.3
 Master Product:

Test Results:

Pile Mass g/m² (oz/yd²): 610 (18.0)
 SPM g/m² (oz/yd²): 377.4 (11.1)
 Stated Pile Height (mm): 3.0
 Minimum Pile Height (mm): 0.0
 Maximum Pile Height (mm): 0.0
 Dynamic Loading Loss (%): 0.0
 Static Loading Loss (%): 0.0
 Tex (g/1000m): 300
 Measured Pile Thickness (mm): 3.0
 Machine Gauge (Tufts/dm): 47.0
 Meas Tufts Perp to Selvedge: 48.0
 Meas Tufts Para to Selvedge: 36.0
 Treated For Soiling Resistance: Yes
 Soil Resist Inhibitor: Yes
 Stain Resist Inhibitor: Yes

Hexapod Scores:

| | Texture | | Colour | | Thickness | |
|-------|---------|-----|--------|-----|-----------|------|
| | WA | | WA | | (mm) | (%) |
| 1500: | 4.0 | 0.0 | 4.0 | 0.0 | 0.1 | 3.3 |
| 8000: | 3.0 | 0.0 | 4.0 | 0.0 | 0.7 | 23.3 |

Quality Assurance Test:

Cut Pile (%): 0
 Loop Pile (%): 100
 Panel Assessment Contract: 14
 Panel Assessment Residential: 14
 Suitable For Stairs: Yes
 Tile: Yes SheetGoods: No
 Fibre Signature: NBA:100

ACCS Test:

| | Con | Res | Max |
|-------------------------|-------|------|-----|
| SPM/PH Ratio: | 13.9 | 16 | 16 |
| Volume Density: | 13.5 | 13.5 | 20 |
| Tuft Density: | 8.5 | 8.5 | 9 |
| Dyn Load: | 3.9 | 3.9 | 5 |
| Stat Load: | 4.1 | 4.1 | 5 |
| Soiling Prop: | 14 | 14 | 16 |
| Abrasion Res: | 9.6 | 9.6 | 10 |
| Sub Total: | 67.5 | 69.6 | 81 |
| Panel Assess: | 14 | 14 | 19 |
| Total: | 81.5 | 83.6 | 100 |
| Calc Residential Grade: | REHD2 | | 6* |
| Calc Contract Grade: | CHD | | 3* |

Calculations

Pile Height(mm): 3.7
 Tuft Density(per dm²): 1728.0
 GSPM(g/m²): 397.0
 GSPM (abrasive) (g/m²): 275.0
 Soiling Propensity: 12.0 +2.0

OAF Values

OAF: 4.2
 Calc Density (+-5%): 0.12 0.126 0.13
 Base Fibre: NYLON
 Benchmarks:
 RHD1 0 RHD2 3.5
 REHD1 3.5 REHD2 3.5

Environmental Classification:

ECS: Yes
 Level: 4

| | Calc | B/M | P/F |
|-----------|------|-----|------|
| Acoustic: | 3 | 3 | PASS |
| Thermal: | 23.8 | 15 | PASS |
| VOC: | | | |
| TVOC | 120 | | |

Notes:

24/1/22 Submitted by X Traslavina. 27/1/22 Panel gave INDICATIVE grading CEHD(S) 4* and ECS Level 4. Requires Pill Test and Extractable Matter Test results. 1/2/22 Compliant Pill Test and Extractable Matter Test results received. Gradings confirmed as CEHD(S) 4* and ECS Level 4.