


# Environmental Certification Scheme

Carpet Name: **VEILED BRUSHWORK**

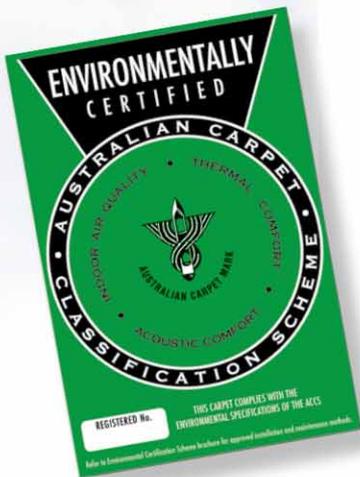

Licensee: **INTERFACE**  
Licence Number: **1016**  
Label Number: **20158**

Certification Approved: **19/01/2021**

Level: **4**

ACCS Contract Grading: **CEHD 4\***  
ACCS Residential Grading: **NONE**  
Suitable for Stairs: **Yes**

Date Printed: **19/01/2021**

*Allan Firth*



**Allan Firth**  
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303  
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560  
Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

**Carpet Details:****Company: INTERFACE****Label No: 20158****Licence No: 1016****Office No: 7076****Names:**

VEILED BRUSHWORK

**Details:**

Awarded Res Grade: NONE  
 Awarded Con Grade: CEHD 4\*  
 Registered On: 23/11/2020  
 Active: Yes  
 Date In-Active:  
 Manufacture Method: Tufted  
 Twist Set: N/A  
 Dyeing Method: Melt Dyed  
 #Colours/Designs: 12/  
 Backing Type: Latex  
 Felted: N/A  
 Spinning System: BCF  
 Insect Resist Agent: N/A  
 Filament: 21.3  
 Master Product:

**Test Results:**

Pile Mass g/m<sup>2</sup> (oz/yd<sup>2</sup>): 678 (20.0)  
 SPM g/m<sup>2</sup> (oz/yd<sup>2</sup>): 420.7 (12.4)  
 Stated Pile Height (mm): 3.0  
 Minimum Pile Height (mm): 0.0  
 Maximum Pile Height (mm): 0.0  
 Dynamic Loading Loss (%): 0.0  
 Static Loading Loss (%): 0.0  
 Tex (g/1000m): 300  
 Measured Pile Thickness (mm): 3.0  
 Machine Gauge (Tufts/dm): 47.0  
 Meas Tufts Perp to Selvedge: 48.0  
 Meas Tufts Para to Selvedge: 44.0  
 Treated For Soiling Resistance: Yes  
 Soil Resist Inhibitor: Yes  
 Stain Resist Inhibitor: Yes

**Hexapod Scores:**

	Texture		Colour		Thickness	
	WA		WA		(mm)	(%)
1500:	4.0	0.0	4.0	0.0	0.2	6.7
8000:	4.0	0.0	3.0	0.0	0.8	26.7

**Quality Assurance Test:**

Cut Pile (%): 0  
 Loop Pile (%): 100  
 Panel Assessment Contract: 14  
 Panel Assessment Residential: 14  
 Suitable For Stairs: Yes  
 Tile: Yes SheetGoods: No  
 Fibre Signature: NBA:100

**ACCS Test:**

	Con	Res	Max
SPM/PH Ratio:	16	16	16
Volume Density:	16.5	16.5	20
Tuft Density:	9	9	9
Dyn Load:	3.9	3.9	5
Stat Load:	4.1	4.1	5
Soiling Prop:	14	14	16
Abrasion Res:	10	10	10
Sub Total:	73.5	73.5	81
Panel Assess:	14	14	19
Total:	87.5	87.5	100
Calc Residential Grade:	REHD2		6*
Calc Contract Grade:	CHD		3*

**Calculations**

Pile Height(mm): 3.4  
 Tuft Density(per dm<sup>2</sup>): 2112.0  
 GSPM(g/m<sup>2</sup>): 397.0  
 GSPM (abrasive) (g/m<sup>2</sup>): 275.0  
 Soiling Propensity: 12.0 +2.0

**OAF Values**

OAF: 4.2  
 Calc Density (+-5%): 0.13 0.140 0.15  
 Base Fibre: NYLON  
 Benchmarks:  
 RHD1 0 RHD2 3.5  
 REHD1 3.5 REHD2 3.5

**Environmental Classification:**

ECS: Yes  
 Level: 4

	Calc	B/M	P/F
Acoustic:	3	3	PASS
Thermal:	21.4	15	PASS
VOC:			
TVOC	20		

**Notes:**

23/11/2020 Submitted by X Traslavina. 25/11/2020 Awaiting Extractable Matter & Pill Test reports. Panel awarded INTERIM grading of CEHD(S) 4\* and ECS Level 4. 18/1/21 Compliant Extractable Matter & Pill Test reports received. Grading confirmed CEHD(S) 4\* and ECS Level 4.