


Environmental Certification Scheme

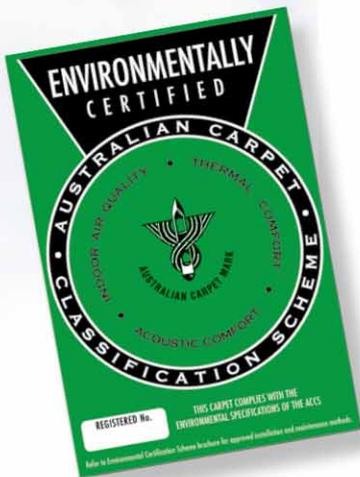

Carpet Name: VIDEO SPECTRUM

Licensee: INTERFACE
Licence Number: 1016
Label Number: 20164

Certification Approved: 23/11/2020

Level: 4

ACCS Contract Grading: CEHD 4*
ACCS Residential Grading: NONE
Suitable for Stairs: Yes

Date Printed: 30/11/2020

Allan Firth



Allan Firth
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560
Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

Carpet Details:**Company: INTERFACE****Label No: 20164****Licence No: 1016****Office No: 7082****Names:**

VIDEO SPECTRUM

Details:

Awarded Res Grade: NONE
 Awarded Con Grade: CEHD 4*
 Registered On: 23/11/2020
 Active: Yes
 Date In-Active:
 Manufacture Method: Tufted
 Twist Set: N/A
 Dyeing Method: Melt Dyed
 #Colours/Designs: 12/
 Backing Type: Latex
 Felted: N/A
 Spinning System: BCF
 Insect Resist Agent: N/A
 Filament: 21.3
 Master Product:

Test Results:

Pile Mass g/m² (oz/yd²): 712 (21.0)
 SPM g/m² (oz/yd²): 456.8 (13.5)
 Stated Pile Height (mm): 3.3
 Minimum Pile Height (mm): 0.0
 Maximum Pile Height (mm): 0.0
 Dynamic Loading Loss (%): 0.0
 Static Loading Loss (%): 0.0
 Tex (g/1000m): 300
 Measured Pile Thickness (mm): 3.3
 Machine Gauge (Tufts/dm): 50.4
 Meas Tufts Perp to Selvedge: 52.0
 Meas Tufts Para to Selvedge: 36.0
 Treated For Soiling Resistance: Yes
 Soil Resist Inhibitor: Yes
 Stain Resist Inhibitor: Yes

Hexapod Scores:

	Texture		Colour		Thickness	
	WA		WA		(mm)	(%)
1500:	4.0	0.0	4.0	0.0	0.4	12.1
8000:	4.0	0.0	3.0	0.0	0.5	15.2

Quality Assurance Test:

Cut Pile (%): 50
 Loop Pile (%): 50
 Panel Assessment Contract: 13
 Panel Assessment Residential: 13
 Suitable For Stairs: Yes
 Tile: Yes SheetGoods: No
 Fibre Signature: NBA:100

ACCS Test:

	Con	Res	Max
SPM/PH Ratio:	14.5	16	16
Volume Density:	12.4	12.4	20
Tuft Density:	9	9	9
Dyn Load:	3.5	3.5	5
Stat Load:	3.5	3.5	5
Soiling Prop:	14	14	16
Abrasion Res:	10	10	10
Sub Total:	66.9	68.4	81
Panel Assess:	13	13	19
Total:	79.9	81.4	100
Calc Residential Grade:	REHD2		6*
Calc Contract Grade:	CHD		3*

Calculations

Pile Height(mm): 4.2
 Tuft Density(per dm²): 1872.0
 GSPM(g/m²): 432.5
 GSPM (abrasive) (g/m²): 275.0
 Soiling Propensity: 12.0 +2.0

OAF Values

OAF: 4.2
 Calc Density (+-5%): 0.13 0.138 0.15
 Base Fibre: NYLON
 Benchmarks:
 RHD1 0 RHD2 3.5
 REHD1 3.5 REHD2 3.5

Environmental Classification:

ECS: Yes

Level: 4

	Calc	B/M	P/F
Acoustic:	3.3	3	PASS
Thermal:	23.8	15	PASS
VOC:			
TVOC	20		

Notes:

23/11/2020 Submitted by X Traslavina. 25/11/2020 Awaiting Extractable Matter & Pill Test reports. Panel awarded INTERIM grading of CEHD(S) 4* and ECS Level 4. 30/11/2020 Compliant Extractable Matter & Pill Test results received. Gradings as confirmed as CEHD(S) 4* and ECS Level 4.