

Environmental Certification Scheme

Carpet Name: PB 323


Licensee: INTERFACE
Licence Number: 1016
Label Number: 16019

Certification Approved: 24/02/2016

Level: 4

ACCS Contract Grading: CEHD 4*
ACCS Residential Grading: NONE
Suitable for Stairs: Yes

Date Printed: 30/09/2020

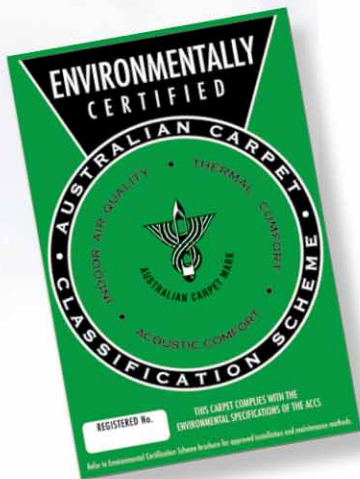

Allan Firth



Allan Firth
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560
Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

Carpet Details:**Company: INTERFACE****Label No: 16019****Licence No: 1016****Office No: 6293****Names:**

PB 323

Details:

Awarded Res Grade: NONE
 Awarded Con Grade: CEHD 4*
 Registered On: 19/02/2016
 Active: Yes
 Date In-Active:
 Manufacture Method: Tufted
 Twist Set: N/A
 Dyeing Method: Melt Dyed
 #Colours/Designs: 12/
 Backing Type: Latex
 Felted: N/A
 Spinning System: BCF
 Insect Resist Agent: N/A
 Filament: 2700
 Master Product:

Test Results:

Pile Mass g/m² (oz/yd²): 1085 (32.0)
 SPM g/m² (oz/yd²): 804.9 (23.7)
 Stated Pile Height (mm): 5.0
 Minimum Pile Height (mm): 0.0
 Maximum Pile Height (mm): 0.0
 Dynamic Loading Loss (%): 0.0
 Static Loading Loss (%): 0.0
 Tex (g/1000m): 300
 Measured Pile Thickness (mm): 5.8
 Machine Gauge (Tufts/dm): 50.4
 Meas Tufts Perp to Selvedge: 51.5
 Meas Tufts Para to Selvedge: 37.0
 Treated For Soiling Resistance: Yes
 Soil Resist Inhibitor: Yes
 Stain Resist Inhibitor: Yes

Hexapod Scores:

| | Texture | | Colour | | Thickness | |
|-------|---------|-----|--------|-----|-----------|------|
| | WA | | WA | | (mm) | (%) |
| 1500: | 4.0 | 0.0 | 4.0 | 0.0 | 0.5 | 8.6 |
| 8000: | 3.5 | 0.0 | 3.0 | 0.0 | 1.0 | 17.2 |

Quality Assurance Test: 10/09/2020

Cut Pile (%): 40

Loop Pile (%): 60

Panel Assessment Contract: 12

Panel Assessment Residential: 12

Suitable For Stairs: Yes

Tile: Yes SheetGoods: No

Fibre Signature: NBA:100

ACCS Test:

| | Con | Res | Max |
|-------------------------|-------|------|-----|
| SPM/PH Ratio: | 16 | 16 | 16 |
| Volume Density: | 12.8 | 12.8 | 20 |
| Tuft Density: | 9 | 9 | 9 |
| Dyn Load: | 3.5 | 3.5 | 5 |
| Stat Load: | 3.5 | 3.5 | 5 |
| Soiling Prop: | 14 | 14 | 16 |
| Abrasion Res: | 10 | 10 | 10 |
| Sub Total: | 68.8 | 68.8 | 81 |
| Panel Assess: | 12 | 12 | 19 |
| Total: | 80.8 | 80.8 | 100 |
| Calc Residential Grade: | REHD2 | | 6* |
| Calc Contract Grade: | CHD | | 3* |

Calculations

Pile Height(mm): 7.2
 Tuft Density(per dm²): 1905.5
 GSPM(g/m²): 424.0
 GSPM (abrasive) (g/m²): 275.0
 Soiling Propensity: 12.0 +2.0

OAF Values

OAF: 4.2
 Calc Density (+-5%): 0.13 0.139 0.15
 Base Fibre: NYLON
 Benchmarks:
 RHD1 0 RHD2 3.5
 REHD1 3.5 REHD2 3.5

Environmental Classification:

ECS: Yes

Level: 4

| | Calc | B/M | P/F |
|-----------|------|-----|------|
| Acoustic: | 5.8 | 3 | PASS |
| Thermal: | 41.8 | 15 | PASS |
| VOC: | | | |
| TVOC | 470 | | |

Notes:

19/2/16 Nylon 6. Submitted by J Azar. 24/2/16 Panel awarded CMD(S) 2* and ECS Level 4. 28/9/2020 QA data. Tufts Parallel dec & Tufts Perpendicular increased.