Workbook 2020/21

Interface®

Work**book** 2020/21

OLD STREET - 9442007 SLATE GRID
INSTALLED - ASHLAR
BROOME STREET - 9440007 BLUE GLASS
MERCER STREET - 9447007 SLATE CIRCLE
INSTALLED - DESIGN BY TILE

Achieving Mission Zero success	**4**
So what's next? Climate Take Back™	**6**
CQuest™ Bio	**8**
Carbon Neutral Floors™	**10**
LVT collections	**12**
Carpet tile collections	**36**
Barrier matting	**210**
Index	**214**

Achieving Mission Zero® success.

In 1994 we set one of the most ambitious sustainability missions ever created. It was not focused just on factories or products – it covered our entire business. We knew it was an aspirational mission, that setting our sights on zero was revolutionary.

After 25 years we had two important realisations:

- Not only had we deeply reduced the impacts of our own company, but we had transformed the products and raw materials in our supply chain.
- We influenced many others along the way, including major corporations, leading designers and business schools.

We had accomplished much more than we'd initially imagined we could.

We are living zero every day and the innovation never stops. We'll keep working to ensure the environment suffers no negative impacts from our business.

We have not reached absolute zero in every category, but we made significant progress and have built this thinking into our business.

Interface®

So what's next?

Climate Take Back™

It's time for creating a climate fit for life. It is a journey where we will see businesses pivot from doing less bad to doing more good.

Reverse global warming.
Create a climate fit for life.
This is our new mission - to run our business in a way that reverses global warming and creates a climate fit for life. A regenerative approach.

Climate Take Back starts with a total, radical shift on how we think about carbon. To stop seeing it as the enemy and start using it as a resource.

Stop & Take
Since the Industrial Revolution and anthropocene, we've been putting too much carbon into our atmosphere.

To tackle this our approach at Interface has been to first, stop adding further excess carbon into our atmosphere. Then, secondly, we look to take the carbon from the atmosphere to support natural and man-made carbon sinks - for example using it in our products.

We believe there are four ways to take back our climate and contribute to reversing global warming. We call them the four pillars.

LIVE ZERO
Aim for zero negative impact on the environment.

LOVE CARBON
Stop seeing carbon as the enemy, and start using it as a resource.

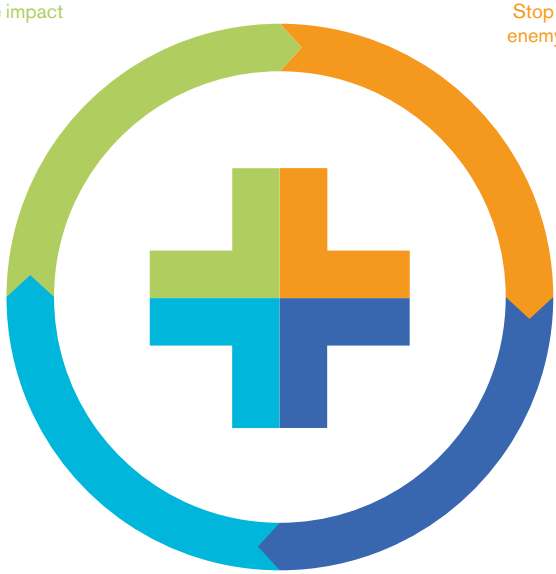

LEAD THE INDUSTRIAL RE-REVOLUTION
Transform industry into a force for the future we want.

LET NATURE COOL
Support our biosphere's ability to regulate the environment.

CQuest™ Bio

our new backing made with carbon negative materials.

We are on a mission to lower the carbon footprint of your space.

Guided by materials science, we've added new thinking and innovative new materials to make backings with a much lower carbon footprint.

First, we added new bio-based materials, and more recycled content to our backings. Then, we measured how these materials influence the carbon footprint. These new materials, measured on a stand-alone basis, are net carbon negative – greatly reducing our carbon footprint.

www.interface.com/cquest

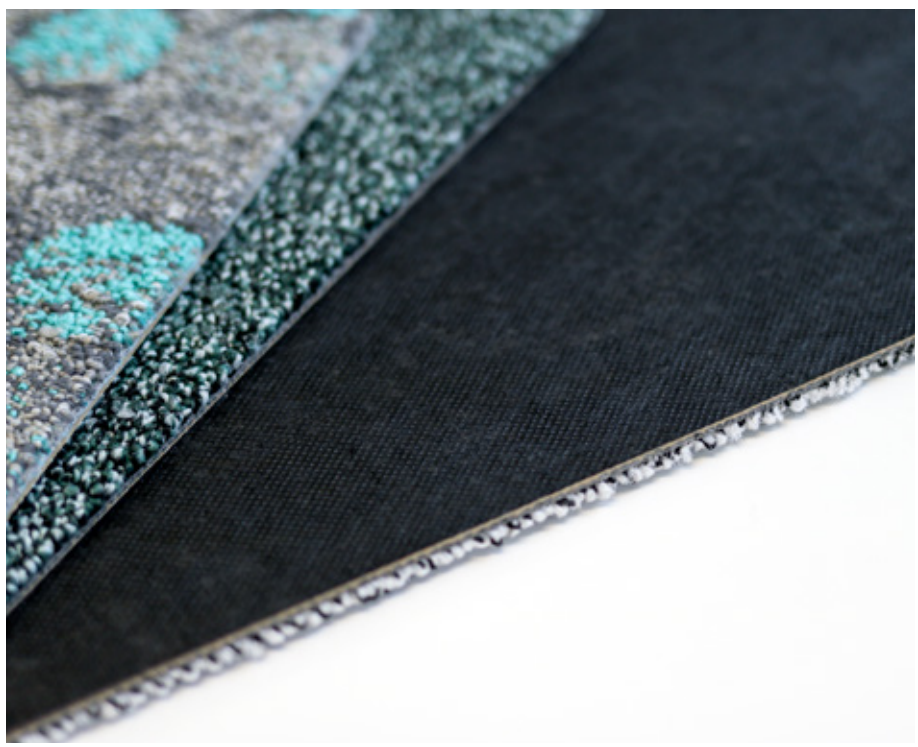

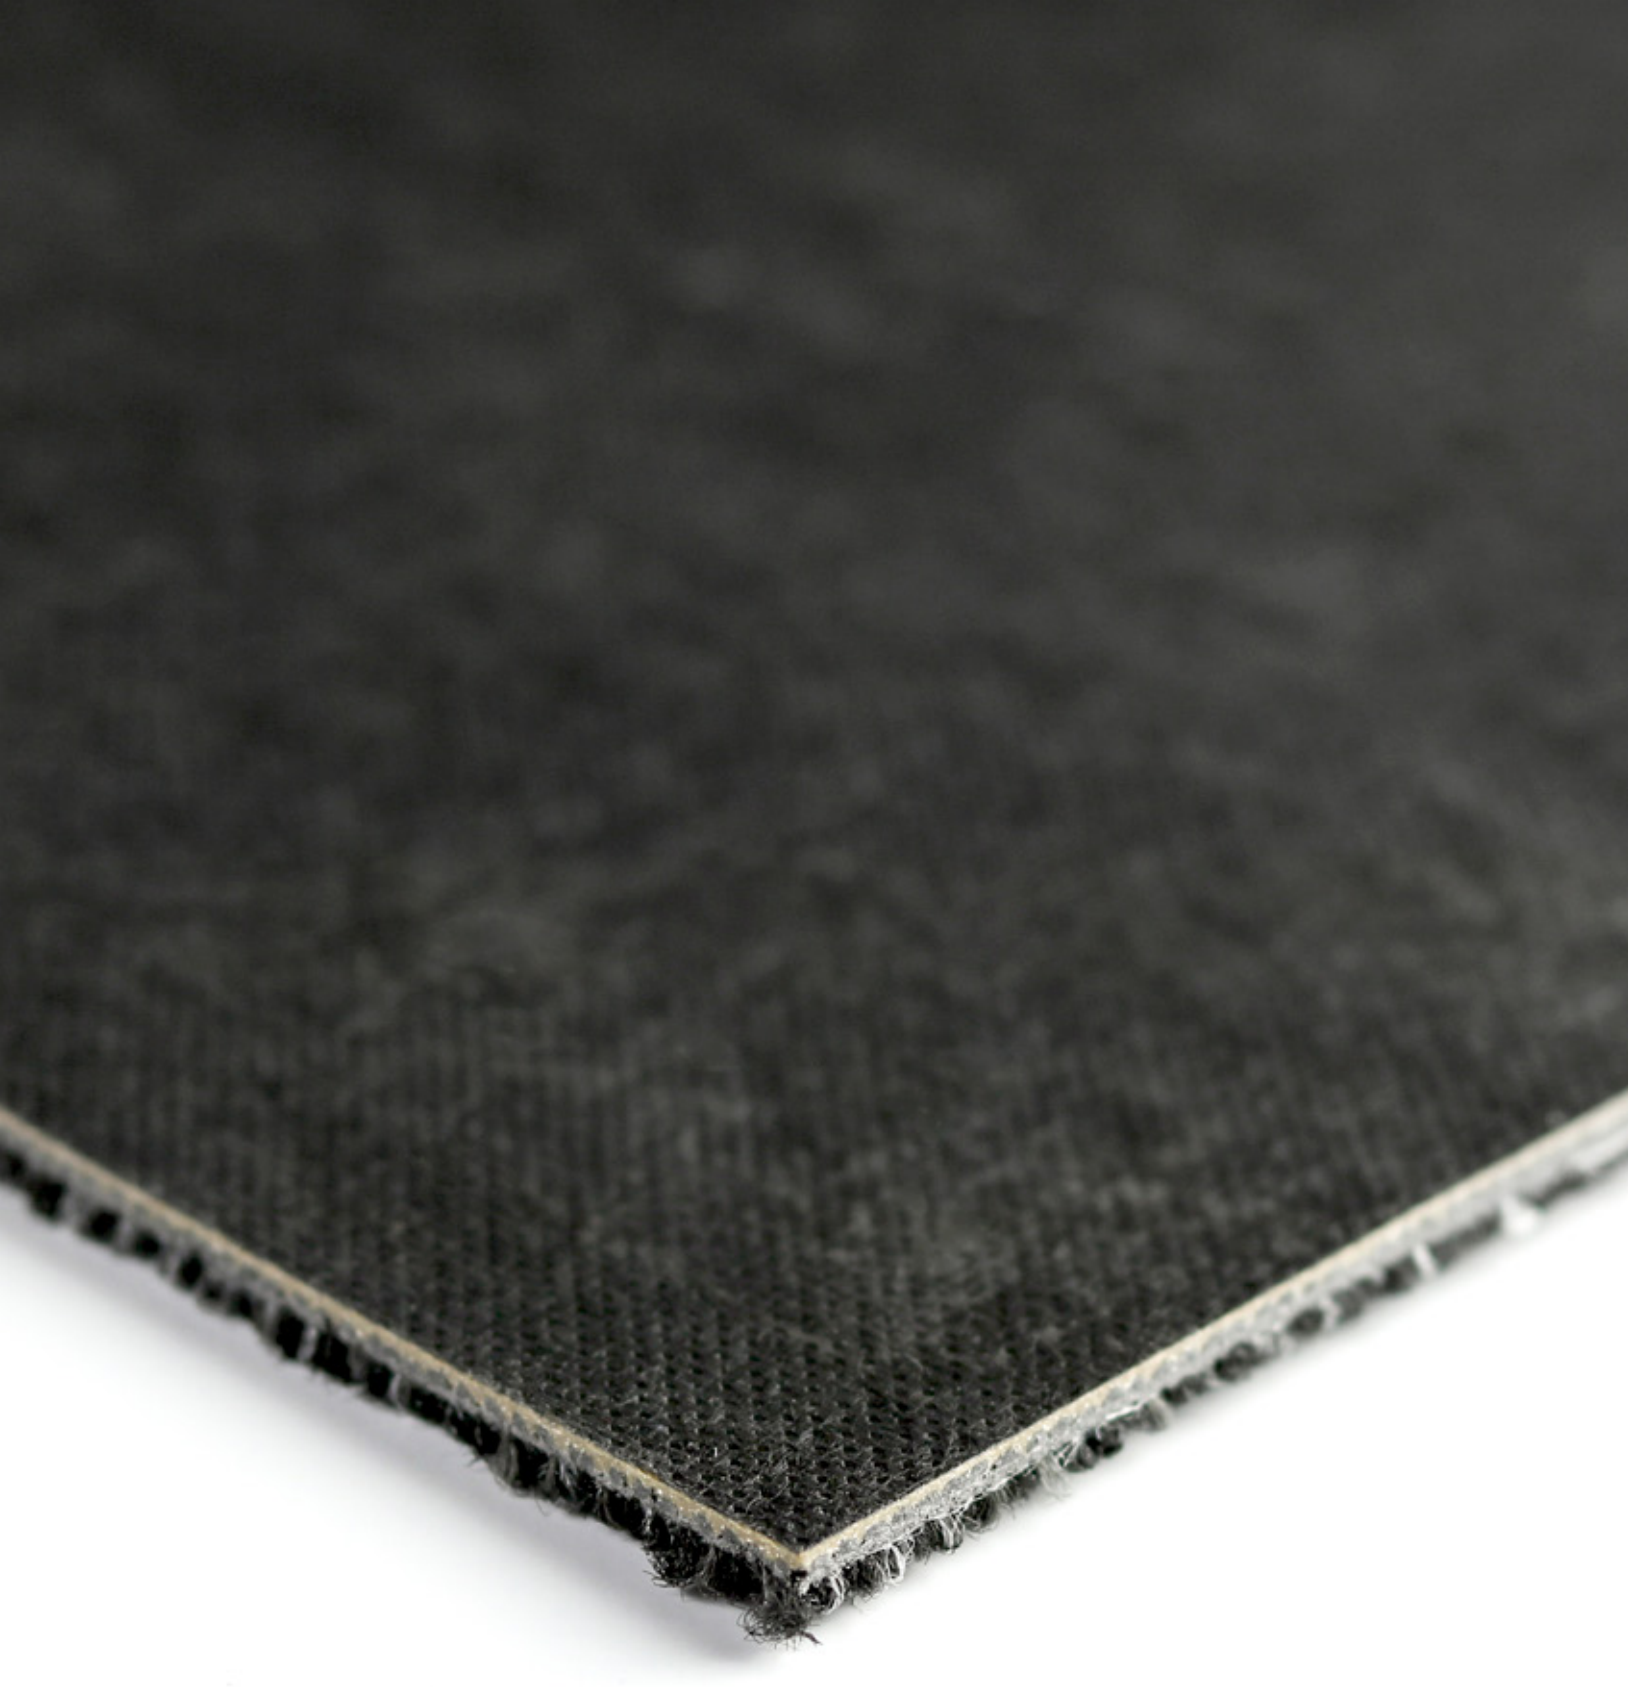

Carbon Neutral Floors™

ALL OF THE FLOORING PRODUCTS THAT WE SELL—CARPET TILE, LVT, AND RUBBER—ARE CARBON NEUTRAL.

We know the impact our flooring has on our planet, whether carpet tiles, LVT or nora® rubber flooring.

It's not just heating and cooling buildings that adds to carbon emissions, but the materials and processes used to create and maintain them. And that includes flooring products.

Reducing this 'embodied carbon' is the most urgent challenge of all. Since 1994, we've been leading our industry in reducing the carbon footprint of our products to become the lowest in the industry through their full lifecycle. And we balance the emissions we still can't avoid by supporting carbon-offset projects in renewable energy, fuel switching and reforestation, to keep carbon in nature and actively removing it from the atmosphere.

INTERFACE

LVT collections.

INTERFACE BIRMINGHAM UK

Brushed Lines

A01601 TALC

A01602 ALABASTER

A01603 MIST

A01604 GALENA

A01605 GRAPHITE

A01606 KOHL

A01607 POWDER

A01608 SANDALWOOD

A01610 BISQUE

A01611 MOUSSE

A01612 SOFT SHADOW

A01613 BLUSH

A01614 HONEY

A01615 HENNA

A01616 ROUGE

A01617 DEW

A01618 CELADON


A01620 TEAL OXIDE


A01621 ARBELLA

A01622 DEEP COBALT

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)

Ashlar Herringbone

BRUSHED LINES - A01613 BLUSH INSTALLED - ASHLAR
BROOME STREET - 9440001 CORAL GLASS INSTALLED - NON DIRECTIONAL

Drawn Lines

A00902 TOPAZ



A00903 BRONZE



A00904 SMOKEY QUARTZ

A00905 AMBER

A00906 AQUAMARINE

A00907 ONYX

A00908 SILVER

A00909 DIAMOND

A00910 OPAL

A00911 AMETHYST

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)

Ashlar Herringbone

DRAWN LINES - A00904 SMOKEY QUARTZ & A00909 DIAMOND
INSTALLED - ASHLAR

Luxury Vinyl Tile

Level Set® Collection - Natural Stones



A00101 JET MIST

A00103 COOL IMPALA MARBLE

Level Set® Collection - Textured Stones

A00301 POLISHED CEMENT



A00302 COOL POLISHED CEMENT



A00303 WARM POLISHED CEMENT

A00304 EMPERADOR GRAY

A00307 CHESTNUT HORSEHAIR

A00308 LIGHT CONCRETE

A00309 MEDIUM CONCRETE

A00310 DARK CONCRETE

A00311 DISTRESSED CONCRETE

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 5113) Jet Mist, Light Concrete, Medium Concrete, Dark Concrete, Distressed Concrete, Chestnut Horsehair R9 (DIN 5113) Cool Impala Marble, Emperador Gray, Polished Cement, Warm Polished Cement, Cool Polished Cement

LEVEL SET TEXTURED STONES - A00311 DISTRESSED CONCRETE
INSTALLED - NON DIRECTIONAL

Level Set® Collection - Natural Woodgrains

A00201 BLACK WALNUT



A00203 CHESTNUT

A00204 BEECH

A00205 STORM

A00206 WINTER GREY

A00207 WASHED WHEAT

A00208 SAND DUNE

A00210 TEAK

A00212 CEDAR

A00214 BAMBOO

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 5113)
	Cedar, Teak, Bamboo
	R9 (DIN 5113)
	Black Walnut, Chestnut, Beech, Washed Wheat, Storm, Winter Grey, Sand Dune

Ashlar Herringbone

LEVEL SET NATURAL WOODGRAINS - A00214 BAMBOO
INSTALLED - ASHLAR

Level Set® Collection - Textured Woodgrains

A00403 DISTRESSED HICKORY

A00405 GREY DUNE

A00406 ANTIQUE LIGHT OAK

A00407 WHITE WASH

A00414 ANTIQUE MAPLE

A00415 ANTIQUE OAK

A00416 ANTIQUE DARK OAK

A00417 SILVER DUNE


A00418 CHARCOAL DUNE

A00419 ANTIQUE ASH OAK

A00420 RUSTIC CASHEW

A00421 RUSTIC OAK

A00422 RUSTIC HICKORY

A00423 RUSTIC ASH

A00424 RUSTIC BIRCH

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 5113) Antique Light Oak, Grey Dune, Antique Oak, Antique Dark Oak, Silver Dune, Charcoal Dune, Antique Ash Oak, Rustic Birch, Rustic Ash, Rustic Hickory, Rustic Cashew, Rustic Oak R9 (DIN 5113) Antique Maple, White Wash, Distressed Hickory

Ashlar Herringbone

LEVEL SET TEXTURED WOODGRAINS - A00417 SILVER DUNE
INSTALLED - HERRINGBONE

Look Both Ways - Walk About

A01401 WARM ASH

A01402 PUMICE


A01403 COOL ASH


A01404 CARBON

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)

WALK ABOUT - A01402 PUMICE
INSTALLED - MONOLITHIC
STEP THIS WAY - 9405001 ALBA
INSTALLED - BRICK

Look Both Ways - Walk of Life

A01201 WARM ASH

A01202 PUMICE

A01203 COOL ASH


A01204 CARBON

A01205 CHARCOAL

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)

WALK OF LIFE - A01205 CHARCOAL
WALK ON BY - A01502 MONOCHROME
INSTALLED - MONOLITHIC

Look Both Ways - Walk on By



A01501 POLYCHROME

A01502 MONOCHROME

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)

Non Directional Brick Quarter Turn Ashlar Monolithic

WALK ON BY - A01502 MONOCHROME
STEP IN TIME - 9403006 JET
INSTALLED - MONOLITHIC

Look Both Ways - Walk the Aisle


A01301 WARM ASH

A01302 PUMICE


A01303 COOL ASH


A01304 CARBON

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)

WALK THE AISLE - A01303 COOL ASH
WALK OF LIFE - A01203 COOL ASH
WALK ABOUT - A01403 COOL ASH
INSTALLED - MONOLITHIC

Luxury Vinyl Tile

Native Fabric

A00801 FLAX

A00802 SEAGRASS

A00803 TATAMI

A00804 STRAW

A00805 LINEN

A00806 TWINE

A00807 BLUEGRASS

A00808 MULBERRY

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)

NATIVE FABRIC - A00805 LINEN & A00801 FLAX
INSTALLED - BRICK

Studio Set

A00701 SILVERLIGHT

A00702 PEWTER

A00703 PEPPER

A00705 TITANIUM

A00706 MUSHROOM

A00707 LIME

A00708 IRIS

A00709 OCEAN

A00710 POPPY

A00711 MANDARIN

A00712 MARIGOLD

A00713 SLATE

Backing	Sound Choice™ Acoustic Backing
Finish	Ceramor™ - UV Stabilized Ceramic Bead Coating
Product Definition	High Performance Luxury Vinyl Tile Contains 39% Pre-Consumer Recycled Content
Wear Layer Thickness	0.55 mm (EN ISO 24340)
Total Weight	6880 g/m^2 (EN ISO 23997)
Total Thickness	4.5 mm (EN ISO 24346)
Wear Classification	EN ISO 10874 33 Heavy Commercial /42 General Light Industrial
Radiant Panel	Euroclass Bfl s1 (EN 13501-1)
Castor Chair	Pass (ISO 4918 / EN425)
Impact Sound Insulation (ΔL_w)	16 dB (EN ISO 10140-3)
Abrasion Resistance	Group T (EN 660-2)
Packaging	2.5 m^2
Pendulum Dry 4S	36+ Low slip potential (BS 7976-2)
Determination of Anti-Slip	R10 (DIN 51130)

Ashlar Herringbone

STUDIO SET - A00701 SILVERLIGHT, A00702 PEWTER & A00703 PEPPER
INSTALLED - DESIGN BY TILE

Carpet tile collections.

TÜRKİYE İŞ BANKASI

Composure

4169002 DIFFUSE

4169003 SOLITUDE

4169005 SERENE

4169007 TRANSCRIBE

4169008 ISOLATION

4169009 CONTENT

4169011 SOOTHE

4169012 RETREAT

4169014 CONTEMPLATE

4169015 HARMONIOUS

4169016 RESERVED

4169017 SECLUSION

4169018 REGARD

4169019 PATIENCE

4169020 SECURE

4169021 DELIBERATE

4169058 SAPPHIRE

4169059 MARINE

4169060 SAILING

4169061 PEWTER

4169062 LAVENDER

4169063 AUBERGINE

4169064 BERRY

4169065 CRANBERRY

4169066 ABYSS

4169067 HARBOUR

4169068 WAVE

4169069 WILLOW

4169070 FERN

4169071 OLIVE

4169072 AMBER

4169073 SUNBURST

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	570 g/m^2 ± 5%
Pile Height	2.6 mm + 15% / - 10%
Total Thickness	6.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 70016FA2
Packaging	4 m^2

Non Directional

COMPOSURE - 4169007 TRANSCRIBE
INSTALLED - NON DIRECTIONAL

Composure Edge



4274001 PEWTER/
ISOLATION



4274002 WAVE/
ISOLATION



4274003 OLIVE/
SECLUSION

4274004 SUNBURST/
SECLUSION



4274005 ABYSS/
DIFFUSE



4274006 SAPPHIRE/
DIFFUSE

4274007 AUBERGINE/
SOLITUDE

4274008 BERRY/
SOLITUDE

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	665 g/m^2 ± 5%
Pile Height	3.0 mm +15% / - 10%
Total Thickness	6.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C46D295E
Packaging	4 m^2

Non Directional

COMPOSURE EDGE - 4274002 WAVE/ISOLATION
INSTALLED - DESIGN BY TILE
COMPOSURE - 4169068 WAVE & 4169008 ISOLATION
INSTALLED - NON DIRECTIONAL

Conscient

4195001 TRACE

4195002 FACTOR

4195003 EMISSION

4195004 REFINED

4195005 ELEMENT

4195006 FRAGMENT

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, 62.5% Biobased
Pile Yarn Weight	686 g/m^2 ± 5%
Pile Height	2.9 mm +15% / - 10%
Total Thickness	5.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	23 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 8139DF56
Packaging	5 m^2

Non Directional

CONSCIENT - 4195004 REFINED
INSTALLED - NON DIRECTIONAL

Contemplation

4263001 HOMESPUN

4263002 PASTORAL

4263003 ELEMENT

4263004 RUSTIC

4263005 ARCADIAN

4263006 HANDICRAFT

4263007 FUNDAMENTAL

4263008 ARTISAN

4263009 PRIMITIVE

4263010 ETHEREAL

4263011 ASPECT


4263012 RURAL

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	580 g/m^2 ± 5%
Pile Height	3.3 mm +15% / - 10%
Total Thickness	6.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 64ACFACF
Packaging	4 m^2

CONTEMPLATION - 4263003 ELEMENT
INSTALLED - NON DIRECTIONAL

Dolomite

4292001 DIAMOND


4292002 CRYSTAL

4292003 OBSIDIAN

4292004 GOLDEN BERYL

4292005 ROSE QUARTZ

4292006 AMBER

4292007 PEARL

4292008 MOONSTONE


4292009 AVENTURINE

4292010 MALACHITE

4292011 AZURITE

4292012 LAPIS LAZULI

Backing	CQuest™Bio
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	850 g/m^2 ± 5%
Pile Height	3.9 mm + 15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≤ 2.4% (EN 986)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - EACAFAB6
Packaging	4m^2

Monolithic

DOLOMITE - 4292003 OBSIDIAN
INSTALLED - MONOLITHIC

Duet

1167028 ASH


1167027 STEEL

1167029 GRANITE

1167004 DOVE

1167006 LUNA

1167008 THUNDER

1167009 LAPIS

1167014 JET

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	610 g/m^2 ± 5%
Pile Height	3.4 mm +15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 3250B94C
Packaging	4 m^2

Non Directional Monolithic

DUET - 1167028 ASH
INSTALLED - MONOLITHIC

Elevation III

4199001 COLLETINO

4199002 BROCATELLO

4199003 PALISSANDRA

4199004 CIOCCOLATO

4199005 FIOR DI PESCO

4199006 CEPPO DI GRE

4199007 GRIGIO NILO

4199008 PORTORO

4199009 CARRARA

4199010 JURA

4199011 VALDEORRAS

4199012 NERO MAQUINA

4199013 BOTTICINO

4199014 ROMANO CLASSICO

4199015 CREMA LUNA


4199016 OPALE NATURALE

4199017 CIPOLLINO

4199018 AQUA MARINA

4199019 AZURO CIELO

4199020 ZIRCONA

Backing	Graphlex®
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	360 g/m² ± 5%
Total Thickness	4.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	12 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B2E536BF
Packaging	5 m²

Quarter Turn

100% **Recycled** Nylon

ELEVATION III - 4199011 VALDEORRAS & 4199013 BOTTICINO
INSTALLED - QUARTER TURN

Employ Dimensions

4271001 VOLUME

4271002 SURFACE



4271003 CONNECT

4271004 PARALLEL

4271005 TIME

4271006 SCALE

4271007 LINE



4271008 MEASURE



4271009 SEGMENT



4271010 OBJECT

Backing	Graphlex®
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	462 g/m^2 ± 5%
Pile Height	2.5 mm + 15% / - 10%
Total Thickness	5.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BDCC61CD
Packaging	5 m^2

Ashlar Herringbone

EMPLOY DIMENSIONS - 4271003 CONNECT
INSTALLED - HERRINGBONE

Employ Lines

4223001 HARVEST

4223002 FORMATION

4223003 QUARRY

4223004 WATERFALL

4223005 SUNSET



4223006 MEADOW



4223007 IRIDESCENT

4223008 CARIBBEAN

Backing	Graphlex®
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	462 g/m^2 ± 5%
Pile Height	2.5 mm + 15% / - 10%
Total Thickness	5.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BFF1D27C
Packaging	5 m^2

Non Directional Quarter Turn Monolithic

EMPLOY LINES - 4223005 SUNSET
INSTALLED - DESIGN BY TILE
EMPLOY LOOP - 4197006 SHALE & 4197021 CLEMENTINE
INSTALLED - MONOLITHIC

Employ Loop

4197001 RAFFIA

4197002 TRUFFLE

4197003 SHADOW

4197004 CARAMEL

4197005 PRALINE


4197006 SHALE

4197007 NUTMEG

4197008 FOUNTAIN


4197009 JET

4197010 RYE

4197011 CIRRUS


4197012 ATLANTIC


4197013 CRYSTAL

4197014 TROPICAL

4197015 KIWI

4197016 NORDIC

4197017 PEACOCK

4197018 EDEN

4197019 BARING


4197020 OXFORD

4197021 CLEMENTINE

4197022 SAPPHIRE

4197023 LAVENDER

4197024 SALSA

Backing	Graphlex®
Product Definition	Tufted Level Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	518 g/m^2 ± 5%
Pile Height	2.6 mm +15% / - 10%
Total Thickness	5.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 085C3EBF
Packaging	5 m^2

EMPLOY LOOP - 4197008 FOUNTAIN
INSTALLED - MONOLITHIC

EM551

7887001 COBBLESTONE ST.

7887003 MAIN ST.

7887004 HILL ST.

7887005 BROAD ST.

7887007 UNION ST.

7887008 OLDTOWN ST.

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m^2 ± 5%
Pile Height	4.3 mm +15% / - 10%
Total Thickness	7.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6ABE29DF
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

EM551 - 7887003 MAIN ST. & 7887004 HILL ST.
INSTALLED - ASHLAR

EM552

7888001 COBBLESTONE AVE.

7888003 MAIN AVE

7888004 HILL AVE.

7888005 BROAD AVE.

7888007 UNION AVE.

7888008 OLDTOWN AVE.

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	949 g/m^2 ± 5%
Pile Height	5.6 mm +15% / - 10%
Total Thickness	9.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 210FA504
Packaging	3 m^2

Ashlar Herringbone

100% **Recycled** Nylon

EM552 - 7888005 BROAD AVE
INSTALLED - ASHLAR

EM553

7889001 COBBLESTONE BLVD.

7889003 MAIN BLVD.

7889004 HILL BLVD.

7889005 BROAD BLVD.

7889007 UNION BLVD.

7889008 OLDTOWN BLVD.

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1221 g/m^2 ± 5%
Pile Height	6.1 mm +15% / - 10%
Total Thickness	9.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 990B5ADO
Packaging	4 m^2

Ashlar Herringbone

100% **Recycled** Nylon

EM553 - 7889007 UNION BLVD
EM551 - 7887007 UNION ST
INSTALLED - HERRINGBONE

Equilibrium

1190092 PERSISTENCE

1190094 CONTINUITY

1190095 CONSISTENCY

1190096 EQUALITY

1190018 MOBILITY

1190021 EQUATION

1190022 SYMMETRY

1190023 SERENITY

1190026 CONTENTMENT

1190028 HARMONY

1190029 MODERATION

1190031 UNIFORMITY

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m^2 ± 5%
Pile Height	4.1 mm + 15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 84479CB4
Packaging	4 m^2

100% **Recycled** Nylon

EQUILIBRIUM - 1190021 EQUATION
INSTALLED - ASHLAR

Heuga 530 II

4288001 GRAVEL

4288002 PEBBLE

4288003 STONE

4288004 CARBON

4288005 SILVER

4288006 DOLPHIN

4288007 BASALT

4288008 BLACK

4288009 SILK GREY

4288010 CASHMERE

4288011 BARK

4288012 TAUPE

4288013 GOLDEN YELLOW

4288014 TERRACOTTA

4288015 DUSTY ROSE

4288016 FROSTED LILAC

4288017 DOVE BLUE

4288018 INDIGO

4288019 BLUEBERRY

4288020 BLUE MOON

4288021 GINGER

4288022 SAGE

4288023 MINT

4288024 FOREST

Backing	Graphlex®
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	660 g/m^2 ± 5%
Pile Height	3.4 mm +15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	28 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - AEDEC94E
Packaging	5 m^2

100% **Recycled** Nylon

HEUGA 530 II - 4288014 TERRACOTTA
INSTALLED - MONOLITHIC

Heuga 580

1267001 NICKEL


1267002 ELEPHANT

1267003 GRANITE


1267004 TWILIGHT

1267005 GREY

1267006 OYSTER

1267007 ONYX

1267008 BLACK

1267009 QUARTZ

1267010 ZIRCON

1267011 EARTH

1267012 EBONY

1267013 FLAX

1267014 TIMBER

1267015 CACAO

1267016 WENGE

1267017 ROSEWOOD

1267018 SISAL

1267019 TEAK

1267020 CHOCOLATE

1267021 LEMON GRASS

1267022 GINGER

1267023 MAHOGANY

1267024 CHILI CHOCOLATE

1267025 CURCUMA

1267026 CHILI

1267027 TANDOORI


1267028 OPERA

1267029 MAGENTA


1267030 FIRECRACKER

1267031 MASSAI RED

1267032 AUBERGINE

1267033 LAVENDER


1267034 VELVET

1267035 MAUVE


1267036 BLACKCURRANT

1267037 SKY

1267038 CORNFLOWER

1267039 OPAL BLUE

1267040 LOBELIA

1267041 LEAK BLUE

1267042 BLUE MOON

Further colors and technical data can be found on the following page.

HEUGA 580 - 1267006 OYSTER
INSTALLED - MONOLITHIC

Heuga 580

1267043 BLUEBERRY

1267044 ULTRA MARINE

1267045 SANTORIN

1267046 CRETE

1267047 DEEP RIVER


1267048 INDIGO

1267049 LAGOON

1267050 CURACAO

1267051 REEF

1267052 ANTILLES

1267053 APPLE

1267054 POISON

1267055 GREEN

1267056 WINDSOR GREEN

1267057 LIME

1267058 KIWI

1267059 PALM

1267060 THE SHIRE

Backing	Graphlex®
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Nylon
Pile Yarn Weight	580 g/m^2 ± 5%
Pile Height	2.8 mm + 15% / - 10%
Total Thickness	5.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DFBF9C2E
Packaging	5 m^2

HEUGA 580 - 1267057 LIME & 1267056 WINDSOR GREEN
INSTALLED - MONOLITHIC

Heuga 725

672501 GRAPHITE

672502 PLATIN

672503 OYSTER

672504 PANTHER

672505 ELEPHANT

672506 COPRA

672507 REAL BLACK

672508 COAL

672509 VIPER

672514 RED

672515 BOUGAINVILLEA

672517 BORDEAUX


672518 VELVET

672520 TURQUOISE

672521 SPRING

672522 OCEAN

672523 TRUE BLUE


672525 NIGHTSKY

Backing	Graphlex®
Product Definition	Tufted Plain Level Cut Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	720 g/m^2 ± 5%
Pile Height	4.2 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 1021C417
Packaging	4 m^2

100% **Recycled** Nylon

HEUGA 725 - 672503 OYSTER
INSTALLED - MONOLITHIC

Heuga 727

4122120 PLATIN (SD)

4122121 ELEPHANT (SD)

4122122 GRAPHITE (SD)

4122123 COAL (SD)

4122124 DUST (SD)

4122125 PEBBLES (SD)

4122126 PANTHER (SD)

4122127 ONYX (SD)


4122128 SILVER (SD)

4122129 COPRA (SD)

4122130 COTTON (SD)

4122131 NUTMEG (SD)

4122132 OYSTER (SD)

4122133 LINEN (SD)

4122134 CAMEL (SD)

4122135 MOCHA (PD)

4122136 SUNFLOWER (PD)

4122137 PAPRIKA (SD)

4122138 HOT PEPPER (SD)

4122139 CHOCOLATE (SD)

4122140 CAYENNE (PD)

4122141 OPERA (SD)

4122142 AMARYLLIS (SD)


4122143 MAUVE (PD)

4122144 PASHMINA (PD)


4122145 FUCHSIA (PD)


4122146 HOT PINK (PD)

4122147 DARK ORCHID (PD)

4122148 LILAC (SD)


4122149 MIDNIGHT (SD)


4122150 BILBERRY (SD)


4122151 BLACKCURRANT (PD)

4122152 MERCURY (SD)

4122153 LAVENDER (SD)


4122154 LOBELIA (SD)


4122155 BLUE RIBAND (SD)

4122156 LAGOON (PD)

4122157 OCEAN (PD)


4122158 COBALT (SD)

4122159 REAL BLUE (PD)

4122160 AEGEAN SEA (PD)

4122161 SPRING (PD)

Further colors and technical data can be found on the following page.

HEUGA 727 - 4122121 ELEPHANT, 4122125 PEBBLES & 4122120 PLATIN
INSTALLED - MONOLITHIC

Heuga 727

4122162 GREEN (PD)


4122163 EMERALD (PD)

4122164 LEMONADE (PD)

4122165 PISTACHIO (PD)

4122166 OLIVE (PD)

4122167 JUNGLE (PD)

Piece Dyed (PD)



Backing	Graphlex®
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	580 g/m^2 ± 5%
Pile Height	2.6 mm + 15% / - 10%
Total Thickness	5.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	23 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 0C5650AF
Packaging	5 m^2

100%
Recycled Nylon

Solution Dyed (SD)

Backing	Graphlex®
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	535 g/m^2 ± 5%
Pile Height	2.5 mm + 15% / - 10%
Total Thickness	5.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	23 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FDC203AA
Packaging	5 m^2

100%
Recycled Nylon

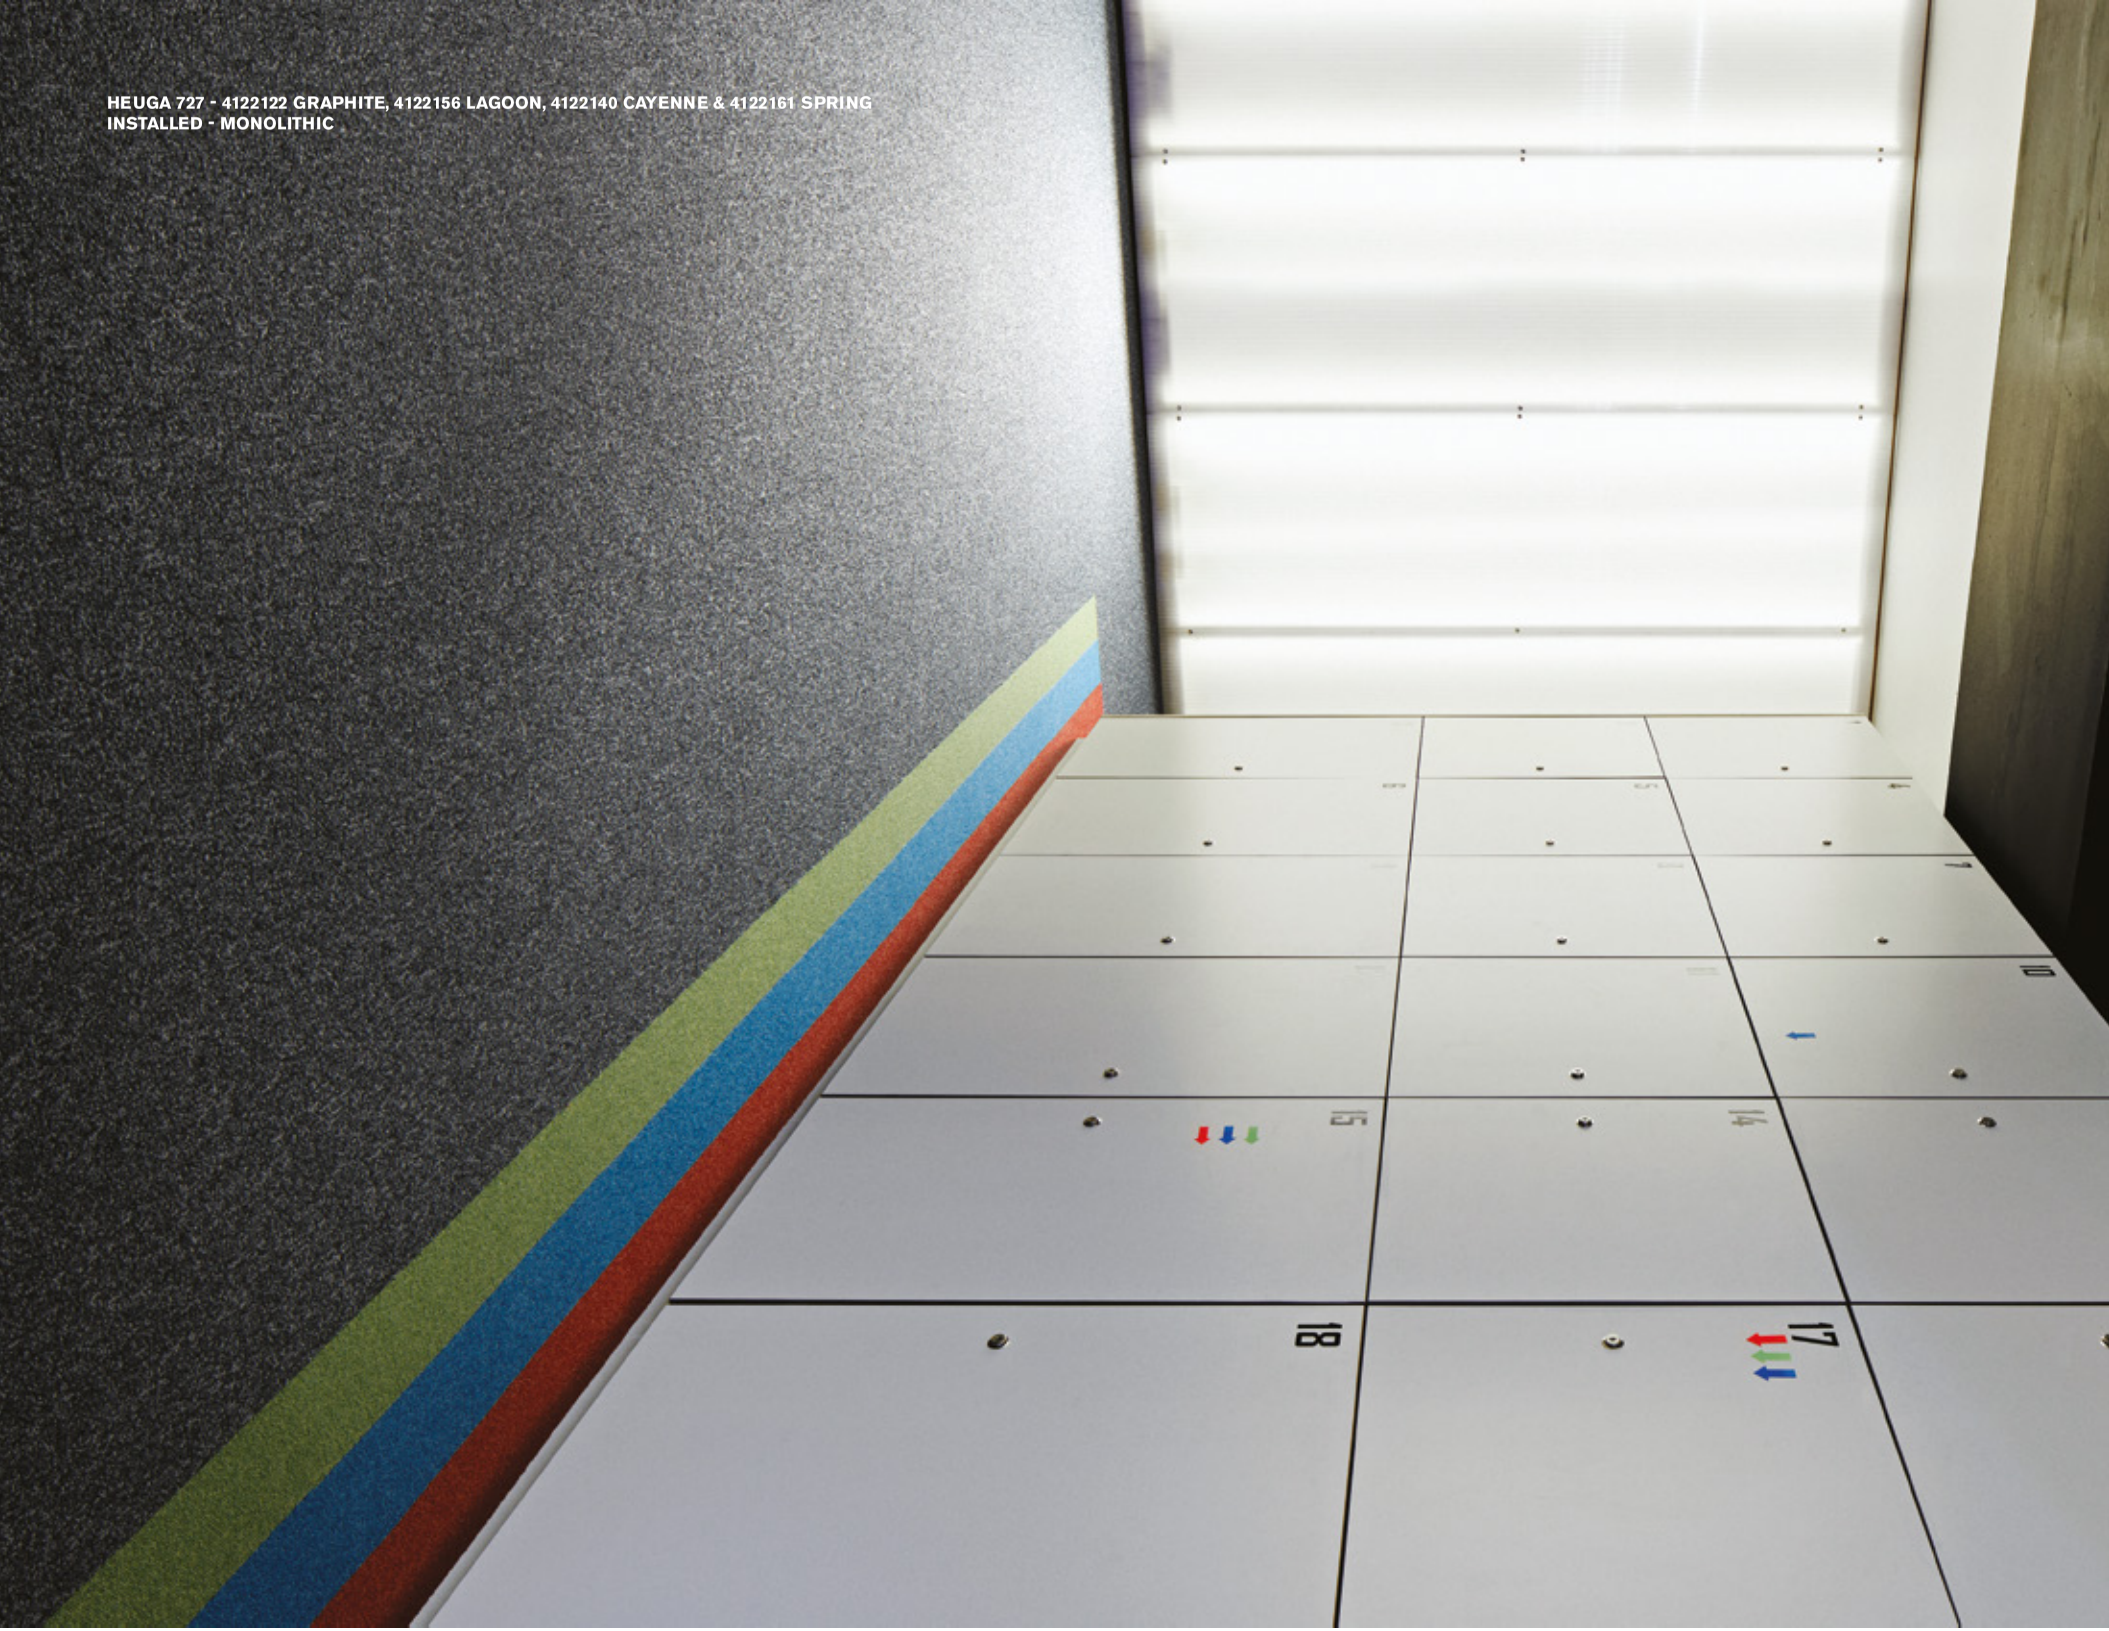

HEUGA 727 - 4122122 GRAPHITE, 4122156 LAGOON, 4122140 CAYENNE & 4122161 SPRING
INSTALLED - MONOLITHIC

Human Connections® Collection

Kerbstone

8339001 GRANITE

8339002 SLATE


8339003 FLINT


8339004 ONYX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m^2 ± 5%
Pile Height	3.5 mm +15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A715C186
Packaging	4 m^2

100% **Recycled** Nylon

Non Directional

Flagstone

8338001 GRANITE

8338002 SLATE

8338003 FLINT

8338004 ONYX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m^2 ± 5%
Pile Height	3.6 mm +15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 92EC845D
Packaging	4 m^2

100% **Recycled** Nylon

Non Directional

Paver

8337001 GRANITE

8337002 SLATE

8337003 FLINT


8337004 ONYX

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	645 g/m^2 ± 5%
Pile Height	3.4 mm +15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1* (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 070DA3FE
Packaging	4 m^2

100% **Recycled** Nylon

**Bfl s1 on request*

Non Directional

FLAGSTONE - 8338003 FLINT & 8338004 ONYX
SETT IN STONE - 8342004 ONYX
INSTALLED - NON DIRECTIONAL

Moss


8341001 GRANITE/ MOSS


8341002 SLATE/MOSS


8341003 FLINT/MOSS


8341004 ONYX/MOSS

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m² ± 5%
Pile Height	4.0 mm +15% / - 10%
Total Thickness	7.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 07BD4B14
Packaging	3 m²

100% **Recycled** Nylon

Non Directional

Moss in Stone


8340001 GRANITE EDGE


8340002 SLATE EDGE


8340003 FLINT EDGE


8340004 ONYX EDGE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	848 g/m² ± 5%
Pile Height	3.9 mm +15% / - 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 0075E59B
Packaging	3 m²

100% **Recycled** Nylon

Non Directional

Sett in Stone

8342001 GRANITE


8342002 SLATE


8342003 FLINT


8342004 ONYX

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m² ± 5%
Pile Height	4.0 mm +15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CAE0DB3
Packaging	4 m²

100% **Recycled** Nylon

Non Directional

MOSS IN STONE - 8340003 FLINT EDGE
SETT IN STONE - 8342003 FLINT
MOSS - 8341003 FLINT/MOSS
INSTALLED - DESIGN BY TILE

Rue

8344001 GREY


8344002 TEAL


8344003 GREEN

8344004 YELLOW

8344005 ORANGE

8344006 RED


8344007 PINK


8344008 PURPLE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m^2 ± 5%
Pile Height	4.5 mm +15% / - 10%
Total Thickness	8.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 841AF5C3
Packaging	4 m^2

100% **Recycled** Nylon

Non Directional

Stone Course

8343001 GREY/STONE


8343002 TEAL/STONE


8343003 GREEN/ STONE


8343004 YELLOW/ STONE


8343005 ORANGE/ STONE


8343006 RED/STONE

8343007 PINK/STONE


8343008 PURPLE/ STONE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	916 g/m^2 ± 5%
Pile Height	3.7 mm +15% / - 10%
Total Thickness	7.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 43B8DCC7
Packaging	4 m^2

100% **Recycled** Nylon

Non Directional

RUE - 8344006 RED & 8344005 ORANGE
STONE COURSE - 8343005 ORANGE/STONE & 8343001 GREY/STONE
INSTALLED - DESIGN BY TILE

HN810

7617002 NICKEL

7617003 SLATE

7617004 LIMESTONE

7617006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1150 g/m^2 ± 5%
Pile Height	4.5 mm +15% / - 10%
Total Thickness	8.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	28 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 23DDBA1E
Packaging	4 m^2

Ashlar Herringbone

100%
Recycled Nylon

HN810 - 7617004 LIMESTONE
HN840 - 7619004 LIMESTONE
HN850 - 7615004 LIMESTONE
HN830 - 7621005 CLEMENTINE
INSTALLED - ASHLAR

HN820

7627002 NICKEL

7627003 SLATE

7627004 LIMESTONE

7627006 SHALE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Cut and Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m^2 ± 5%
Pile Height	3.3 mm +15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) **Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 04AEA2FD
Packaging	4.5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

HN820 - 7627006 SHALE
HN840 - 7619006 SHALE
INSTALLED - DESIGN BY TILE

HN830

7621001 PERSIMMON

7621002 MAIZE

7621003 BLACK

7621004 COBALT

7621005 CLEMENTINE

7621006 KIWI

7621007 PISTACHIO

7621008 BONE

Backing	CQuest™Bio
Product Definition	Tufted Plain Shag Cut Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1425 g/m^2 ± 5%
Pile Height	8.2 mm + 15% / - 10%
Total Thickness	11.6 mm ± 0.5 mm
Wear Classification	General Contract (EN 1307) Class 32 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.0
Impact Sound Insulation (ΔL_w)	30 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C793A286
Packaging	2.5 m^2

Ashlar

Borders, Accents and Insets Only

100% **Recycled** Nylon

HN810 - 7617004 LIMESTONE
HN840 - 7619004 LIMESTONE
HN850 - 7615004 LIMESTONE
HN830 - 7621006 KIWI
INSTALLED - ASHLAR

HN840

7619002 NICKEL

7619003 SLATE



7619004 LIMESTONE

7619006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	980 g/m^2 ± 5%
Pile Height	4.7 mm +15% / - 10%
Total Thickness	9.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CFCEA25F
Packaging	4 m^2

Ashlar Herringbone

100% **Recycled** Nylon

HN840 - 7619002 NICKEL
INSTALLED - ASHLAR

HN850



7615002 NICKEL

7615003 SLATE

7615004 LIMESTONE



7615006 SHALE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1085 g/m^2 ± 5%
Pile Height	4.8 mm + 15% / - 10%
Total Thickness	9.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	29 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 3BDA6E06
Packaging	4 m^2

Ashlar Herringbone

100% **Recycled** Nylon

HN860 - 7615003 SLATE
INSTALLED - ASHLAR

Ice Breaker

4282001 CONCRETE

4282002 GRANITE

4282003 JETMIST

4282004 CHALK

4282005 GRITSTONE


4282006 OBSIDIAN

4282007 CLAYSTONE

4282008 SILTSTONE


4282009 QUARRY

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	616 g/m^2 ± 5%
Pile Height	3.7 mm +15% / - 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BCAD9D21
Packaging	5 m^2

Non Directional

ICE BREAKER - 4282007 CLAYSTONE
LEVEL SET - A00311 DISTRESSED CONCRETE
INSTALLED - NON DIRECTIONAL

Step Aside


9404001 ALBA


9404002 ASH


9404003 EBONY

9404004 COAL


9404005 INDIGO


9404006 JET

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	882 g/m^2 ± 5%
Pile Height	3.4 mm +15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 1E67E84C
Packaging	4 m^2

STEP ASIDE - 9404006 JET
INSTALLED - ASHLAR
WALK OF LIFE - A01204 CARBON
INSTALLED - MONOLITHIC

Step in Time

9403001 ALBA

9403002 ASH

9403003 EBONY

9403004 COAL

9403005 INDIGO

9403006 JET

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	848 g/m^2 ± 5%
Pile Height	3.1 mm +15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 0A1F98B8
Packaging	4 m^2

STEP IN TIME - 9403002 ASH
INSTALLED - MONOLITHIC

Step it Up

9406001 ALBA

9406002 CORALITE


9406003 ASH

9406004 CITRINE


9406005 EBONY


9406006 SIENNA

9406007 COAL

9406008 SLATE

9406009 INDIGO

9406010 AZURE

9406011 JET


9406012 JADE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	610 g/m^2 ± 5%
Pile Height	3.0 mm +15% / - 10%
Total Thickness	6.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C51AE8E6
Packaging	4 m^2

Brick Ashlar

STEP IT UP - 9406002 CORALITE
INSTALLED - MONOLITHIC

Look Both Ways Collection

Step this Way


9405001 ALBA


9405002 ASH


9405003 EBONY


9405004 COAL


9405005 INDIGO


9405006 JET

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m^2 ± 5%
Pile Height	3.3 mm +15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4AB6E848
Packaging	4 m^2

STEP THIS WAY - 9405005 INDIGO
INSTALLED - BRICK

Monochrome

346690 MILLSTONE

346691 PLATINUM

346692 TITANIUM

346694 STORM

346695 SEAL

346696 CARBON

346697 BLACK

346698 SILVER


346699 SURF

346702 MERCURY

346703 FLEMISH BLUE

346704 PACIFIC

346705 PEACOCK

346707 FLAG BLUE

346708 LOBELIA

346711 IRIS

346713 ELDERBERRY

346714 VERY BERRY

346715 LILAC HAZE

346717 DAMSON

346718 ORANGE

346719 GERBERA

346722 MALT

346723 PUTTY

346724 RHINO

346734 SPUN GOLD

346735 DANDELION

346736 MEADOW

346725 COFFEE BEAN

346726 CREAM

346727 CARAWAY

346730 BARLEY

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	787 g/m^2 ± 5%
Pile Height	3.8 mm +15% / - 10%
Total Thickness	7.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 54AA6565
Packaging	4 m^2

Monolithic

100% **Recycled** Nylon

MONOCHROME - 346702 MERCURY & 346714 VERY BERRY
INSTALLED - MONOLITHIC
LEVEL SET - A00424 RUSTIC BIRCH
INSTALLED - ASHLAR

NF400

7848003 FELT

7848004 MINERAL

7848005 DRIFTWOOD

7848006 LINEN


7848007 SHALE

7848009 HEMP

NF401

7959002 FELT


7959001 MINERAL

7959005 DRIFTWOOD

7959004 LINEN

7959003 SHALE

7959006 HEMP

NF400

Ashlar Herringbone

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m^2 ± 5%
Pile Height	3.4 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 3B8BE6C3
Packaging	5 m^2

100% **Recycled** Nylon

NF401

Ashlar Herringbone

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1153 g/m^2 ± 5%
Pile Height	6.6 mm + 15% / - 10%
Total Thickness	10.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	29 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - D03BE29D
Packaging	4 m^2

100% **Recycled** Nylon

NF400 - 7848003 FELT
NF401 - 7959002 FELT
INSTALLED - ASHLAR

B601


7414001 BLACK SEA


7414002 NORTH SEA


7414003 PACIFIC

7414004 ARCTIC


7414005 ATLANTIC

7414006 CASPIAN

7414007 SAND

7414008 DRIFTWOOD

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	950 g/m^2 ± 5%
Pile Height	4.4 mm +15% / - 10%
Total Thickness	9.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 1DEA04D6
Packaging	3 m^2

100% **Recycled** Nylon

Non Directional

B602

7416001 BLACK SEA


7416002 NORTH SEA

7416003 PACIFIC

7416004 ARCTIC

7416005 ATLANTIC

7416006 CASPIAN

7416007 SAND

7416008 DRIFTWOOD

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	882 g/m^2 ± 5%
Pile Height	3.9 mm +15% / - 10%
Total Thickness	9.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CB95E35B
Packaging	4 m^2

100% **Recycled** Nylon

Non Directional

B603

7418001 BLACK SEA

7418002 NORTH SEA

7418003 PACIFIC

7418004 ARCTIC

7418005 ATLANTIC

7418006 CASPIAN

7418007 SAND

7418008 DRIFTWOOD

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m^2 ± 5%
Pile Height	2.9 mm +15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BECF8B5D
Packaging	4 m^2

100% **Recycled** Nylon

Non Directional

B601 - 7414003 PACIFIC
B602 - 7416003 PACIFIC
B603 - 7418003 PACIFIC
INSTALLED - DESIGN BY TILE

New Horizons II

5581 WHEAT

5582 OAK

5583 NOUGAT

5584 CHAMELEON

5585 PEBBLES


5586 ASH

5587 SILVER

5588 PLATIN

5589 CARBON

5590 SKY

5591 MARINE

5592 AMARYLLIS

5593 STEEL

5594 COBALT

5595 NAVY

5596 PETROL

5597 PALM

5598 WINDSOR

Backing	Graphlex®
Product Definition	Tufted Plain Level Loop Pile
Pile Material	100% Nylon
Pile Yarn Weight	550 g/m^2 ± 5%
Pile Height	2.3 mm + 15% / - 10%
Total Thickness	5.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	23 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B77541F8
Packaging	5 m^2

NEW HORIZONS II - 5589 CARBON
INSTALLED - MONOLITHIC

Broome Street



9440001 CORAL GLASS



9440002 BRICK GLASS



9440003 YELLOW GLASS



9440004 GREEN GLASS



9440005 TURQUOISE GLASS



9440006 TEAL GLASS



9440007 BLUE GLASS



9440008 BLACK GLASS

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	949 g/m^2 ± 5%
Pile Height	3.7 mm +15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 08E9ABC0
Packaging	3 m^2

Non Directional Monolithic

BROOME STREET - 9440003 YELLOW GLASS
WHELER STREET - 9438003 IRON SQUARE
INSTALLED - MONOLITHIC

Dover Street

9444001 CONCRETE DOT


9444002 BROWN DOT

9444003 IRON DOT

9444004 STEEL DOT


9444005 METAL DOT

9444006 GRAPHITE DOT

9444007 SLATE DOT

9444008 BLACK DOT

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m^2 ± 5%
Pile Height	2.7 mm +15% / - 10%
Total Thickness	6.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A0CBBBB9
Packaging	4 m^2

Monolithic

DOVER STREET - 9444001 CONCRETE DOT
INSTALLED - MONOLITHIC

Mercer Street



9447001 CONCRETE CIRCLE



9447002 BROWN CIRCLE



9447003 IRON CIRCLE



9447004 STEEL CIRCLE



9447005 METAL CIRCLE



9447006 GRAPHITE CIRCLE



9447007 SLATE CIRCLE

9447008 BLACK CIRCLE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	780 g/m^2 ± 5%
Pile Height	3.9 mm +15% / - 10%
Total Thickness	7.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DFA56BE2
Packaging	4 m^2

Monolithic

MERCER STREET - 9447002 BROWN CIRCLE
INSTALLED - MONOLITHIC

Old Street

9442001 CONCRETE GRID


9442002 BROWN GRID

9442003 IRON GRID

9442004 STEEL GRID

9442005 METAL GRID

9442006 GRAPHITE GRID

9442007 SLATE GRID

9442008 BLACK GRID

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	610 g/m^2 ± 5%
Pile Height	2.8 mm +15% / - 10%
Total Thickness	6.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 027A18F2
Packaging	5 m^2

OLD STREET - 9442001 CONCRETE GRID & 9442005 METAL GRID
INSTALLED - MONOLITHIC

Reade Street

9446001 CONCRETE PLATE

9446002 BROWN PLATE

9446003 IRON PLATE

9446004 STEEL PLATE

9446005 METAL PLATE

9446006 GRAPHITE PLATE

9446007 SLATE PLATE

9446008 BLACK PLATE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	814 g/m^2 ± 5%
Pile Height	3.4 mm +15% / - 10%
Total Thickness	7.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CC60E83A
Packaging	4 m^2

Monolithic

READE STREET - 9446003 IRON PLATE
INSTALLED - MONOLITHIC

Wheler Street

9438001 CONCRETE SQUARE

9438002 BROWN SQUARE

9438003 IRON SQUARE

9438004 STEEL SQUARE

9438005 METAL SQUARE

9438006 GRAPHITE SQUARE



9438007 SLATE SQUARE

9438008 BLACK SQUARE

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	644 g/m^2 ± 5%
Pile Height	3.2 mm +15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 083CE1DD
Packaging	4 m^2

Non Directional Monolithic

WHELER STREET - 9438007 SLATE SQUARE
INSTALLED - MONOLITHIC

Off Line

7559001 MUSHROOM/BISCUIT

7559002 MUSHROOM/MUSTARD

7559003 SAGE/BISCUIT

7559004 SAGE/CANARY

7559005 PEWTER/CLOUD

7559006 PEWTER/MANDARIN

7559007 PEPPER/CLOUD

7559008 PEPPER/LIME

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	718 g/m^2 ± 5%
Pile Height	3.8 mm +15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - F582EB62
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

OFF LINE - 7559006 PEWTER/MANDARIN & 7559005 PEWTER/CLOUD
ON LINE - 7335007 PEWTER
INSTALLED - ASHLAR

On Line

7335001 BISCUIT

7335002 MUSHROOM

7335003 MUSTARD

7335004 SAGE

7335005 CANARY

7335006 CLOUD

7335007 PEWTER

7335008 MANDARIN

7335009 PEPPER

7335010 LIME


7335015 TOPAZ

7335016 INK


7335017 FOREST

7335018 AZURE


7335019 LAPIS


7335020 POPPY


7335021 DUNE

7335022 TITANIUM


7335023 SABLE


7335024 GRANITE


7335025 PIGEON

7335026 AQUAMARINE

7335027 COBALT


7335028 MAGENTA

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	718 g/m^2 ± 5%
Pile Height	3.7 mm ± 0.5 mm
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 316BEC58
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

ON LINE - 7335017 FOREST
LEVEL SET TEXTURED WOODGRAINS - A00406 ANTIQUE LIGHT OAK
INSTALLED - ASHLAR

Polichrome Solid

4266001 METAL

4266002 MOUSEY

4266003 CLOUDBURST

4266004 LIQUORICE

4266005 SILK GREY

4266006 CINDER

4266007 SHIITAKE

4266008 MOLE

4266009 WATERFALL

4266010 DISTANT

4266011 DAPHNE

4266012 PERIDOT

4266013 COLUMBIA

4266014 POWDERBLUE

4266015 BLUE NIGHTS

4266016 DAIQUIRI

4266017 TURTLEDOVE

4266018 MIMOSA

4266019 BUBBLEGUM

4266020 VIOLA

4266021 MARZIPAN

4266022 CARROT

4266023 GRENADINE

4266024 MALVA

Backing	Graphlex®
Product Definition	Tufted Frieze Cut Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	1215 g/m^2 ± 5%
Pile Height	4.0 mm + 15% / - 10%
Total Thickness	7.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BE7E98D9
Packaging	4 m^2

Monolithic

100% **Recycled** Nylon

POLICHROME SOLID - 4266017 TURTLEDOVE
POLICHROME STIPPLE - 4265017 LINEN
INSTALLED - MONOLITHIC

Polichrome Stipple


4265001 DRIZZLE

4265002 DOLPHIN

4265003 CAVIAR

4265004 JAVA

4265005 MOONROCK

4265006 SMOKY PEARL

4265007 HEMP

4265008 PEAT

4265009 ALHAMBRA

4265010 NIAGARA

4265011 LOBELIA

4265012 HERBAL

4265013 EVERGLADE

4265014 INFINITY

4265015 MAZARINE

4265016 CACTUS

4265017 LINEN

4265018 BUTTERCUP

4265019 ROSEBUD

4265020 TULIP

4265021 HAZEL

4265022 NECTARINE

4265023 LOLLIPOP

4265024 MULBERRY

Backing	Graphlex®
Product Definition	Tufted Frieze Cut Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	1100 g/m^2 ± 5%
Pile Height	4.2 mm + 15% / - 10%
Total Thickness	7.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC4
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B7BB9CDC
Packaging	4 m^2

Monolithic

100% **Recycled** Nylon

POLICHROME STIPPLE - 4265001 DRIZZLE & 4265020 TULIP
POLICHROME SOLID - 4266020 VIOLA
INSTALLED - DESIGN BY TILE

Radial - *Moving to Custom 2021*

4272001 AXIS

4272002 ANGLE

4272003 RAYS

4272004 SIGNAL

4272005 ATOMIZED

4272006 DIFFUSE

4272007 VERTEX


4272008 DISPERSE


4272009 PROPORTION

4272010 PROJECTION

4272011 PERSPECTIVE

4272012 VISTA

Backing	Graphlex®
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	848 g/m^2 ± 5%
Pile Height	3.5 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 644BAD27
Packaging	4 m^2

Non Directional

RADIAL - 4272004 SIGNAL
INSTALLED - NON DIRECTIONAL

Straightforward II

4268002 STEEL


4268005 SLATE

4268001 GRANITE

4268003 LEAD

4268004 IRON

4268006 COFFEE

4268007 MINK

4268013 MEADOW

4268018 CRYSTAL

4268017 PACIFIC

4268010 CHINA

4268009 DELPHINIUM

Backing	Graphlex®
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon derived from biomass
Pile Yarn Weight	420 g/m^2 ± 5%
Total Thickness	4.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	14 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - Pending
Packaging	5 m^2

Non Directional

STRAIGHTFORWARD II - 4268005 SLATE
INSTALLED - NON DIRECTIONAL

Superflor

9008 GREY

9023 MID BROWN

9101 YIPPEE

9102 FRUITY

9103 MAGIC


9106 ELECTRA

9155 RAVEN


9156 OCEANUS

9157 LAGOON BLUE

9162 PRIMAVERA

9164 PACIFIC SUNSET


9165 PINE FOREST

9169 SIBERIAN FROST

9174 ARCTIC DAWN

9191 SEVILLE PASSION

9194 BERBER BEIGE

9198 IRISH COFFEE


9199 BUFFALO

Backing	Graphlar®
Product Definition	Needlefelt Plain Brushed Hair Pile
Pile Material	82.5% Nylon, 17.5% Polyester
Pile Yarn Weight	1380 g/m^2 ± 5%
Pile Height	4.1 mm +15% / - 10%
Total Thickness	7.8 mm ± 0.5 mm
Wear Classification	Heavy Contract / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.25 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 4B1B12FD
Packaging	5 m^2

Quarter Turn

SUPERFLOR - 9008 GREY
INSTALLED - QUARTER TURN

The Scandinavian Collection

1543001 BERGEN

1543002 HELSINKI

1543003 REYKJAVIK

1543004 STOCKHOLM


1543006 MALMO

1543012 COPENHAGEN

1543013 NORDKAPP

1543016 HEKLA

1543033 VISBY

1543034 TORSHAVN

1543035 NARVIK

1543036 KIRKENES

Backing	Graphlex®
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	400 g/m² ± 5%
Total Thickness	4.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	14 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 87086FF4
Packaging	5 m²

Quarter Turn

THE SCANDINAVIAN COLLECTION - 1543001 BERGEN
INSTALLED - QUARTER TURN

Touch & Tones 101

4174001 SILVER

4174002 NEUTRAL GREY

4174003 LINEN

4174004 GREIGE

4174005 ELEPHANT

4174006 TAUPE

4174007 TOBACCO

4174008 BLACK

4174009 ORANGE

4174010 RED

4174011 BOUGAINVILLEA

4174012 GRAPE

4174013 ULTRA MARINE

4174014 TURQUOISE

4174015 LEMONADE

4174016 MOSS

Backing	Graphlex®
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	700 g/m^2 ± 5%
Pile Height	3.3 mm + 15% / - 10%
Total Thickness	6.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	23 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BD6DD528
Packaging	5 m^2

Monolithic

100% **Recycled** Nylon

TOUCH & TONES 101 - 4174002 NEUTRAL GREY
TOUCH & TONES 103 - 4176014 TURQUOISE
INSTALLED - MONOLITHIC

Touch & Tones 102

4175001 SILVER

4175002 NEUTRAL GREY

4175003 LINEN

4175004 GREIGE

4175005 ELEPHANT

4175006 TAUPE

4175007 TOBACCO

4175008 BLACK

4175009 ORANGE

4175010 RED

4175011 BOUGAINVILLEA

4175012 GRAPE

4175013 ULTRA MARINE

4175014 TURQUOISE

4175015 LEMONADE

4175016 MOSS

Backing	Graphlex®
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Nylon
Pile Yarn Weight	925 g/m^2 ± 5%
Pile Height	4.9 mm + 15% / - 10%
Total Thickness	7.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - E432ADDD
Packaging	4 m^2

Monolithic

100% **Recycled** Nylon

TOUCH & TONES 101 - 4174002 NEUTRAL GREY
TOUCH & TONES 102 - 4175002 NEUTRAL GREY
TOUCH & TONES 103 - 4176002 NEUTRAL GREY
INSTALLED - MONOLITHIC

Touch & Tones 103

4176001 SILVER


4176002 NEUTRAL GREY

4176003 LINEN

4176004 GREIGE

4176005 ELEPHANT

4176006 TAUPE

4176007 TOBACCO

4176008 BLACK

4176009 ORANGE

4176010 RED

4176011 BOUGAINVILLEA

4176012 GRAPE

4176013 ULTRA MARINE

4176014 TURQUOISE

4176015 LEMONADE

4176016 MOSS

Backing	Graphlex®
Product Definition	Tufted Plain Shag Cut Pile
Pile Material	100% Nylon
Pile Yarn Weight	1314 g/m^2 ± 5%
Pile Height	7.2 mm +15% / - 10%
Total Thickness	10.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BFC53AA4
Packaging	3 m^2

Monolithic

TOUCH & TONES 101 - 4774003 LINEN
TOUCH & TONES 102 - 4775004 GREIGE
TOUCH & TONES 103 - 4776004 GREIGE
INSTALLED - MONOLITHIC

Touch of Timber

4191001 BALSA

4191002 BAMBOO

4191003 OAK

4191004 ELM

4191005 SILVER BIRCH

4191006 ASH

4191007 MAPLE

4191008 SYCAMORE



4191009 BLUE SPRUCE

4191010 OLIVE

4191011 WALNUT

4191012 BLACKWOOD

Backing	Graphlex®
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	499 g/m² ± 5%
Total Thickness	5.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	14 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BCCD7633
Packaging	5 m²

Ashlar Herringbone

100% **Recycled** Nylon

TOUCH OF TIMBER - 4191009 BLUE SPRUCE
INSTALLED - HERRINGBONE

Transformation

1628068 OATMEAL

1628069 MANILLA

1628063 SHELL

1628004 MEADOW

1628019 WADI

1628064 CLAY

1628014 DESERT

1628029 PLANTATION

1628013 STEPPE

1628070 PARCHMENT

1628075 TRUFFLE

1628066 PEWTER

1628011 RIVER

1628072 SAXON

1628065 GABBRO

1628073 BARING

1628010 FERN

1628020 AMAZON

1628067 NIGHTSHADE

1628074 AZURE

1628024 LAVA

1628016 TROPICS

1628026 MOORLAND


1628025 PASTURE

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	576 g/m^2 ± 5%
Pile Height	3.3 mm +15% / - 10%
Total Thickness	6.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - FB53AAD0
Packaging	4 m^2

Non Directional

TRANSFORMATION - 1628065 GABBRO
INSTALLED - NON DIRECTIONAL

Twist & Shine Micro - *Moving to Custom 2021*

4190001 STONE MICRO

4190002 SMOKE MICRO

4190005 CLOUD MICRO

4190007 THUNDER MICRO

4190008 MIDNIGHT MICRO

4190009 SPRUCE MICRO

Backing	Graphlex®
Product Definition	Microtuft Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	534 g/m² ± 5%
Total Thickness	5.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	14 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6AF89D47
Packaging	5 m²



100% **Recycled** Nylon

TWIST & SHINE MICRO - 4190002 SMOKE MICRO
INSTALLED - MONOLITHIC

Unity

1136056 FOSSIL

1136055 BONE

1136007 PUMICE

1136058 HUSK

1136059 PEBBLE

1136002 GRAPHITE

1136003 BOULDER

1136001 CRYSTAL

1136004 CARBON

1136065 LIME

1136064 DANDELION

1136062 LAGOON

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon, Contains Recycled Content
Pile Yarn Weight	590 g/m^2 ± 5%
Pile Height	2.7 mm +15% / - 10%
Total Thickness	5.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - D1F55D31
Packaging	4 m^2

UNITY - 1136059 PEBBLE
INSTALLED - ASHLAR

UR101

7148002 CHARCOAL/ LICHEN

7148003 STRAW/GRASS

7148004 GRANITE/ LICHEN

7148005 FLAX/GRASS

7148006 STONE/IVY

7148008 ASH/IVY

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	851 g/m^2 ± 5%
Pile Height	2.6 mm +15% / - 10%
Total Thickness	8.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 004EA8FB
Packaging	4 m^2

100% **Recycled** Nylon

Non Directional

UR102

7146002 CHARCOAL

7146003 STRAW

7146004 GRANITE


7146005 FLAX

7146006 STONE

7146008 ASH

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	863 g/m^2 ± 5%
Pile Height	2.4 mm +15% / - 10%
Total Thickness	7.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 04BE58F6
Packaging	4 m^2

100% **Recycled** Nylon


Non Directional Quarter Turn

UR103

7150001 LICHEN


7150002 IVY


7150004 GRASS

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	857 g/m^2 ± 5%
Pile Height	2.6 mm +15% / - 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A9D4CE0E
Packaging	4 m^2

100% **Recycled** Nylon


Non Directional Quarter Turn

UR101 - 7148005 FLAX/GRASS
UR102 - 7146005 FLAX
UR103 - 7150004 GRASS
INSTALLED - DESIGN BY TILE

UR202

7136001 BARK

7136002 CHARCOAL

7136003 STRAW

7136004 GRANITE

7136005 FLAX

7136006 STONE

7136007 SAGE

7136008 ASH

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	886 g/m^2 ± 5%
Pile Height	3.8 mm +15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1* (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CACC31EC
Packaging	4 m^2

100% **Recycled** Nylon

**Bfl s1 on request*

Quarter Turn Monolithic

UR301


7134001 BARK

7134002 CHARCOAL

7134003 STRAW

7134004 GRANITE

7134005 FLAX

7134006 STONE

7134007 SAGE

7134008 ASH

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	842 g/m^2 ± 5%
Pile Height	2.4 mm +15% / - 10%
Total Thickness	7.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BB3BBFD9
Packaging	4 m^2

100% **Recycled** Nylon

Non Directional

UR303


7132001 BARK

7132002 CHARCOAL

7132003 STRAW

7132004 GRANITE

7132005 FLAX

7132006 STONE

7132007 SAGE

7132008 ASH

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	783 g/m^2 ± 5%
Pile Height	3.1 mm +15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 9F6CFA50
Packaging	4 m^2

100% **Recycled** Nylon

Monolithic

UR301 - 7134004 GRANITE
INSTALLED - NON DIRECTIONAL

UR501

7267001 GOLD

7267004 STRAW

7267005 GRASS

7267007 FLAX

7267009 BLUE

7267010 NAVY

7267011 ASH

7267012 STONE

7267013 ORANGE

7267014 RED

7267015 GRANITE

7267016 CHARCOAL

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	861 g/m^2 ± 5%
Pile Height	4.6 mm +15% / - 10%
Total Thickness	8.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 697D3D29
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

UR 501 - 7267001 GOLD & 7267015 GRANITE
INSTALLED - HERRINGBONE

Circuit Board



9280001 ORANGE CIRCUIT

9280002 YELLOW CIRCUIT

9280003 GREEN CIRCUIT



9280004 TEAL CIRCUIT



9280005 BLUE CIRCUIT



9280006 PURPLE CIRCUIT

9280007 MAGENTA CIRCUIT



9280008 RED CIRCUIT

Backing	Graphlex®
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m^2 ± 5%
Pile Height	3.6 mm + 15% / - 10%
Total Thickness	7.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 7761FAAC
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

CIRCUIT BOARD - 9280005 BLUE CIRCUIT & 9280004 TEAL CIRCUIT
STATIC LINES - 9276003 LEAD STATIC
INSTALLED - DESIGN BY TILE

Darning

9273001 B&W DARNING

Backing	Graphlex®
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m² ± 5%
Pile Height	3.3 mm +15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CBCBB1C9
Packaging	5 m²

100% **Recycled** Nylon

Ashlar Herringbone

Decibel



9275001 B&W DECIBEL

Backing	Graphlex®
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	746 g/m² ± 5%
Pile Height	3.2 mm +15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - CB8E2ECA
Packaging	5 m²

100% **Recycled** Nylon

Ashlar Herringbone

Haptic

9274001 B&W HAPTIC

Backing	Graphlex®
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m² ± 5%
Pile Height	2.9 mm +15% / - 10%
Total Thickness	6.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6A951291
Packaging	5 m²

100% **Recycled** Nylon

Ashlar Herringbone

Overedge

9271001 B&W OVEREDGE

Backing	Graphlex®
Product Definition	Tufted Patterned Shag Cut Tile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1424 g/m² ± 5%
Pile Height	8.9 mm +15% / - 10%
Total Thickness	11.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC5
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	30 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6D9DFC08
Packaging	2.5 m²

100% **Recycled** Nylon

Ashlar Herringbone

DARNING - 9273001 B&W DARNING, DECIBEL - 9276001 B&W DECIBEL & OVEREDGE - 9271001 B&W OVEREDGE
INSTALLED - ASHLAR

Hard Drive

9277001 STEEL HD



9277002 PEWTER HD

9277003 LEAD HD

9277004 GRANITE HD

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	814 g/m^2 ± 5%
Pile Height	3.1 mm + 15% / - 10%
Total Thickness	7.3 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 3EEACA2C
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

HARD DRIVE - 9277002 PEWTER HD
INSTALLED - ASHLAR

Plain Stitch

9278001 NICKEL PLAIN

9278002 IRON PLAIN



9278003 GREY PLAIN

9278004 GRAPHITE PLAIN

9278005 FLINT PLAIN

9278006 CHARCOAL PLAIN



9278007 SLATE PLAIN

9278008 BLACK PLAIN

Backing	Graphlex®
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	576 g/m^2 ± 5%
Pile Height	2.7 mm +15% / - 10%
Total Thickness	5.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - AC170814
Packaging	5 m^2

Ashlar Herringbone

100%
Recycled Nylon

PLAIN STITCH - 9278005 FLINT PLAIN & 9278006 CHARCOAL PLAIN
INSTALLED - ASHLAR

Static Lines



9276001 STEEL STATIC

9276002 PEWTER STATIC

9276003 LEAD STATIC

9276004 GRANITE STATIC

Backing	Graphlex®
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	848 g/m^2 ± 5%
Pile Height	3.0 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - C4A8FDDA
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

STATIC LINES - 92766002 PEWTER STATIC
INSTALLED - ASHLAR

Stitch Count



9279001 NICKEL COUNT



9279002 IRON COUNT

9279003 GREY COUNT

9279004 GRAPHITE COUNT

9279005 FLINT COUNT

9279006 CHARCOAL COUNT



9279007 SLATE COUNT

9279008 BLACK COUNT

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	915 g/m^2 ± 5%
Pile Height	5.1 mm +15% / - 10%
Total Thickness	8.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC3
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 5995B502
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

STITCH COUNT - 9279005 FLINT COUNT
INSTALLED - ASHLAR

Stitchery



9281001 NICKEL STITCHERY



9281002 IRON STITCHERY



9281003 GREY STITCHERY

9281004 GRAPHITE STITCHERY



9281005 FLINT STITCHERY

9281006 CHARCOAL STITCHERY

9281007 SLATE STITCHERY

9281008 BLACK STITCHERY

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	576 g/m^2 ± 5%
Pile Height	2.6 mm +15% / - 10%
Total Thickness	5.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DBBE1B6C
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

STITCHERY - 9281002 IRON STITCHERY & 9281003 GREY STITCHERY
INSTALLED - ASHLAR

Works Balance

4283001 COAL

4283002 SEAL

4283003 STEEL

4283004 PLATINUM

4283005 PEWTER

4283006 LINEN



4283007 TEAL

4283008 NAVY

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	558 g/m^2 ± 5%
Pile Height	3.6 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 054EF8BC
Packaging	5 m^2

Ashlar Herringbone

WORKS BALANCE - 4283003 STEEL
INSTALLED - ASHLAR
LEVEL SET TEXTURED STONES - A00302 COOL POLISHED CEMENT
INSTALLED - NON DIRECTIONAL

Works Dash - *Moving to Custom 2021*


4277001 CANARY


4277002 SUNRISE

4277003 AQUA

4277004 LIME

4277005 VIOLET

4277006 COBALT

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	585 g/m^2 ± 5%
Pile Height	3.4 mm +15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6FD2E715
Packaging	4 m^2

WORKS DASH - 4277002 SUNRISE
INSTALLED - BRICK

Works Flow

4276001 LINEN

4276002 MINK

4276003 MOCHA


4276004 PEBBLE

4276005 CHARCOAL

4276006 BLACK

4276007 CANARY


4276008 SUNRISE

4276009 AQUA


4276010 LIME


4276011 VIOLET

4276012 COBALT

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	600 g/m² ± 5%
Pile Height	3.3 mm +15% / - 10%
Total Thickness	6.6 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6FD2E715
Packaging	4 m²

WORKS FLOW - 4276004 PEBBLE
LEVEL SET TEXTURED STONES - A00302 COOL POLISHED CEMENT
INSTALLED - MONOLITHIC

Works Fluid

4285001 EBONY

4285002 STORM

4285003 CONCRETE

4285004 DOVE

4285005 SHADOW

4285006 TAUPE

4285007 DRIZZLE

4285008 DENIM

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	596 g/m^2 ± 5%
Pile Height	3.7 mm +15% / - 10%
Total Thickness	7.1 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 054EF8BC
Packaging	5 m^2

Ashlar Herringbone

WORKS FLUID - 4285003 CONCRETE
INSTALLED - ASHLAR

Works Freestyle



4284001 NICKEL



4284002 SLATE

4284003 IRON

4284004 SMOKE



4284005 ICE

4284006 CLOUD

4284007 PEARL

4284008 COTTON

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	596 g/m^2 ± 5%
Pile Height	3.9 mm + 15% / - 10%
Total Thickness	7.2 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 054EF8BC
Packaging	5 m^2

Ashlar Herringbone

WORKS FREESTYLE - 4284006 CLOUD
INSTALLED - ASHLAR

Works Geometry

4278001 MINK

4278002 LINEN

4278003 CHARCOAL

4278004 CANARY

4278005 SUNRISE


4278006 AQUA


4278007 LIME

4278008 VIOLET

4278009 COBALT

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	570 g/m^2 ± 5%
Pile Height	3.7 mm + 15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	24 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6FD2E715
Packaging	4 m^2

WORKS GEOMETRY - 4278001 MINK
INSTALLED - ASHLAR
EMPLOY LOOP - 4197002 TRUFFLE
INSTALLED - MONOLITHIC

Works Hype


4275001 CANARY


4275002 SUNRISE

4275003 AQUA


4275004 LIME

4275005 VIOLET

4275006 COBALT

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	583 g/m^2 ± 5%
Pile Height	3.8 mm +15% / - 10%
Total Thickness	7.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 6FD2E715
Packaging	4 m^2

Brick Ashlar Monolithic

WORKS HYPE - 4275004 LIME
INSTALLED - ASHLAR
LEVEL SET NATURAL STONES - A00101 JET MIST
INSTALLED - MONOLITHIC

WW860

8109001 LINEN TWEED

8109002 FLANNEL TWEED

8109003 CHARCOAL TWEED

8109004 BLACK TWEED

8109005 BROWN TWEED

8109006 NATURAL TWEED

8109007 RAFFIA TWEED

8109008 SISAL TWEED

Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	575 g/m^2 ± 5%
Pile Height	2.5 mm +15% / - 10%
Total Thickness	5.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	23 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - B89BB549
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

WW860 - 8109006 NATURAL TWEED & 8109007 RAFFIA TWEED
WW895 - 8114007 GLEN WEAVE
INSTALLED - ASHLAR

WW865



8110001 HEATHER WARP

8110002 LOCH WARP

8110003 HIGHLAND WARP



8110004 MOORLAND WARP



8110005 FUCHSIA WARP



8110006 AUTUMN WARP

8110007 GLEN WARP

8110008 DALE WARP

Backing	CQuest™Bio
Product Definition	Tufted Patterned Level Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	575 g/m^2 ± 5%
Pile Height	2.5 mm +15% / - 10%
Total Thickness	5.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	23 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.15 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - BD7C4AD6
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

WW865 - 8110004 MOORLAND WARP
WW890 - 8113002 FLANNEL DOBBY
INSTALLED - ASHLAR

WW870



8111001 LINEN WEFT



8111002 FLANNEL WEFT

8111003 CHARCOAL WEFT

8111004 BLACK WEFT

8111005 BROWN WEFT



8111006 NATURAL WEFT

8111007 RAFFIA WEFT

8111008 SISAL WEFT

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	780 g/m^2 ± 5%
Pile Height	3.1 mm +15% / - 10%
Total Thickness	6.8 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	27 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 0FBFEA39
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

WW870 - 8111002 FLANNEL WEFT & 8111001 LINEN WEFT
INSTALLED - DESIGN BY TILE

WW880

8112001 LINEN LOOM

8112002 FLANNEL LOOM

8112003 CHARCOAL LOOM

8112004 BLACK LOOM

8112005 BROWN LOOM

8112006 NATURAL LOOM

8112007 RAFFIA LOOM

8112008 SISAL LOOM

Backing	CQuest™Bio
Product Definition	Tufted Patterned Structured Tip Sheared Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	850 g/m^2 ± 5%
Pile Height	4.1 mm +15% / - 10%
Total Thickness	7.5 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1* (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - A26BE79E
Packaging	5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

WW880 - 8112006 NATURAL LOOM
INSTALLED - ASHLAR

WW890

8113001 LINEN DOBBY

8113002 FLANNEL DOBBY

8113003 CHARCOAL DOBBY



8113004 BLACK DOBBY

8113005 BROWN DOBBY

8113006 NATURAL DOBBY



8113007 RAFFIA DOBBY

8113008 SISAL DOBBY

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m^2 ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - DD8BAE5B
Packaging	4.5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

WW890 - 8118004 BLACK DOBBY & 8113006 NATURAL DOBBY
INSTALLED - DESIGN BY TILE

WW895



8114001 HEATHER WEAVE

8114002 LOCH WEAVE

8114003 HIGHLAND WEAVE



8114004 MOORLAND WEAVE

8114005 FUCHSIA WEAVE

8114006 AUTUMN WEAVE



8114007 GLEN WEAVE

8114008 DALE WEAVE

Backing	CQuest™Bio
Product Definition	Tapestry Tufted Patterned Structured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	1017 g/m^2 ± 5%
Pile Height	3.8 mm + 15% / - 10%
Total Thickness	8.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	26 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - ADEA3D34
Packaging	4.5 m^2

Ashlar Herringbone

100% **Recycled** Nylon

WW895 - 8114001 | HEATHER WEAVE
INSTALLED | ASHLAR

Yuton 104

4080015 JET

4080016 METAL

4080017 PEWTER

4080018 MIST

4080019 STEEL

4080020 SILVER

4080021 NIMBUS

4080022 PEBBLE

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	541 g/m^2 ± 5%
Pile Height	2.9 mm +15% / - 10%
Total Thickness	6.0 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - 3A6F77CC
Packaging	4 m^2

YUTON 104 - 4080016 METAL
INSTALLED - NON DIRECTIONAL

Yuton 105

4159014 COAL

4159015 LEAD

4159016 URBAN

4159017 OVERCAST

4159018 FOSSIL

4159019 ICE

4159020 TRUFFLE

4159021 BISCUIT

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	561 g/m^2 ± 5%
Pile Height	2.9 mm +15% / - 10%
Total Thickness	6.4 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	4 m^2

Ashlar Monolithic

YUTON 105 - 4159019 ICE
INSTALLED - MONOLITHIC

Yuton 106

4290001 MIDNIGHT

4290002 SMOKE

4290003 IRON

4290004 FOG



4290005 TITANIUM

4290006 PEARL

4290007 DOVE

4290008 PARCHMENT

Backing	Graphlex®
Product Definition	Tufted Patterned Structured Loop Pile
Pile Material	100% Solution Dyed Nylon
Pile Yarn Weight	531 g/m^2 ± 5%
Pile Height	2.7 mm +15% / - 10%
Total Thickness	5.9 mm ± 0.5 mm
Wear Classification	Heavy Contract (EN 1307) Class 33 / LC1
Radiant Panel	(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Castor Chair	≥ 2.4 (EN 985)
Impact Sound Insulation (ΔL_w)	25 dB (EN ISO 10140-3)
Sound Absorption	α_w 0.20 (EN ISO 11654)
Indoor Air Quality	GUT PRODIS - PENDING
Packaging	4m^2

Non Directional

YUTON 106 - 4290006 PEARL
INSTALLED - NON DIRECTIONAL

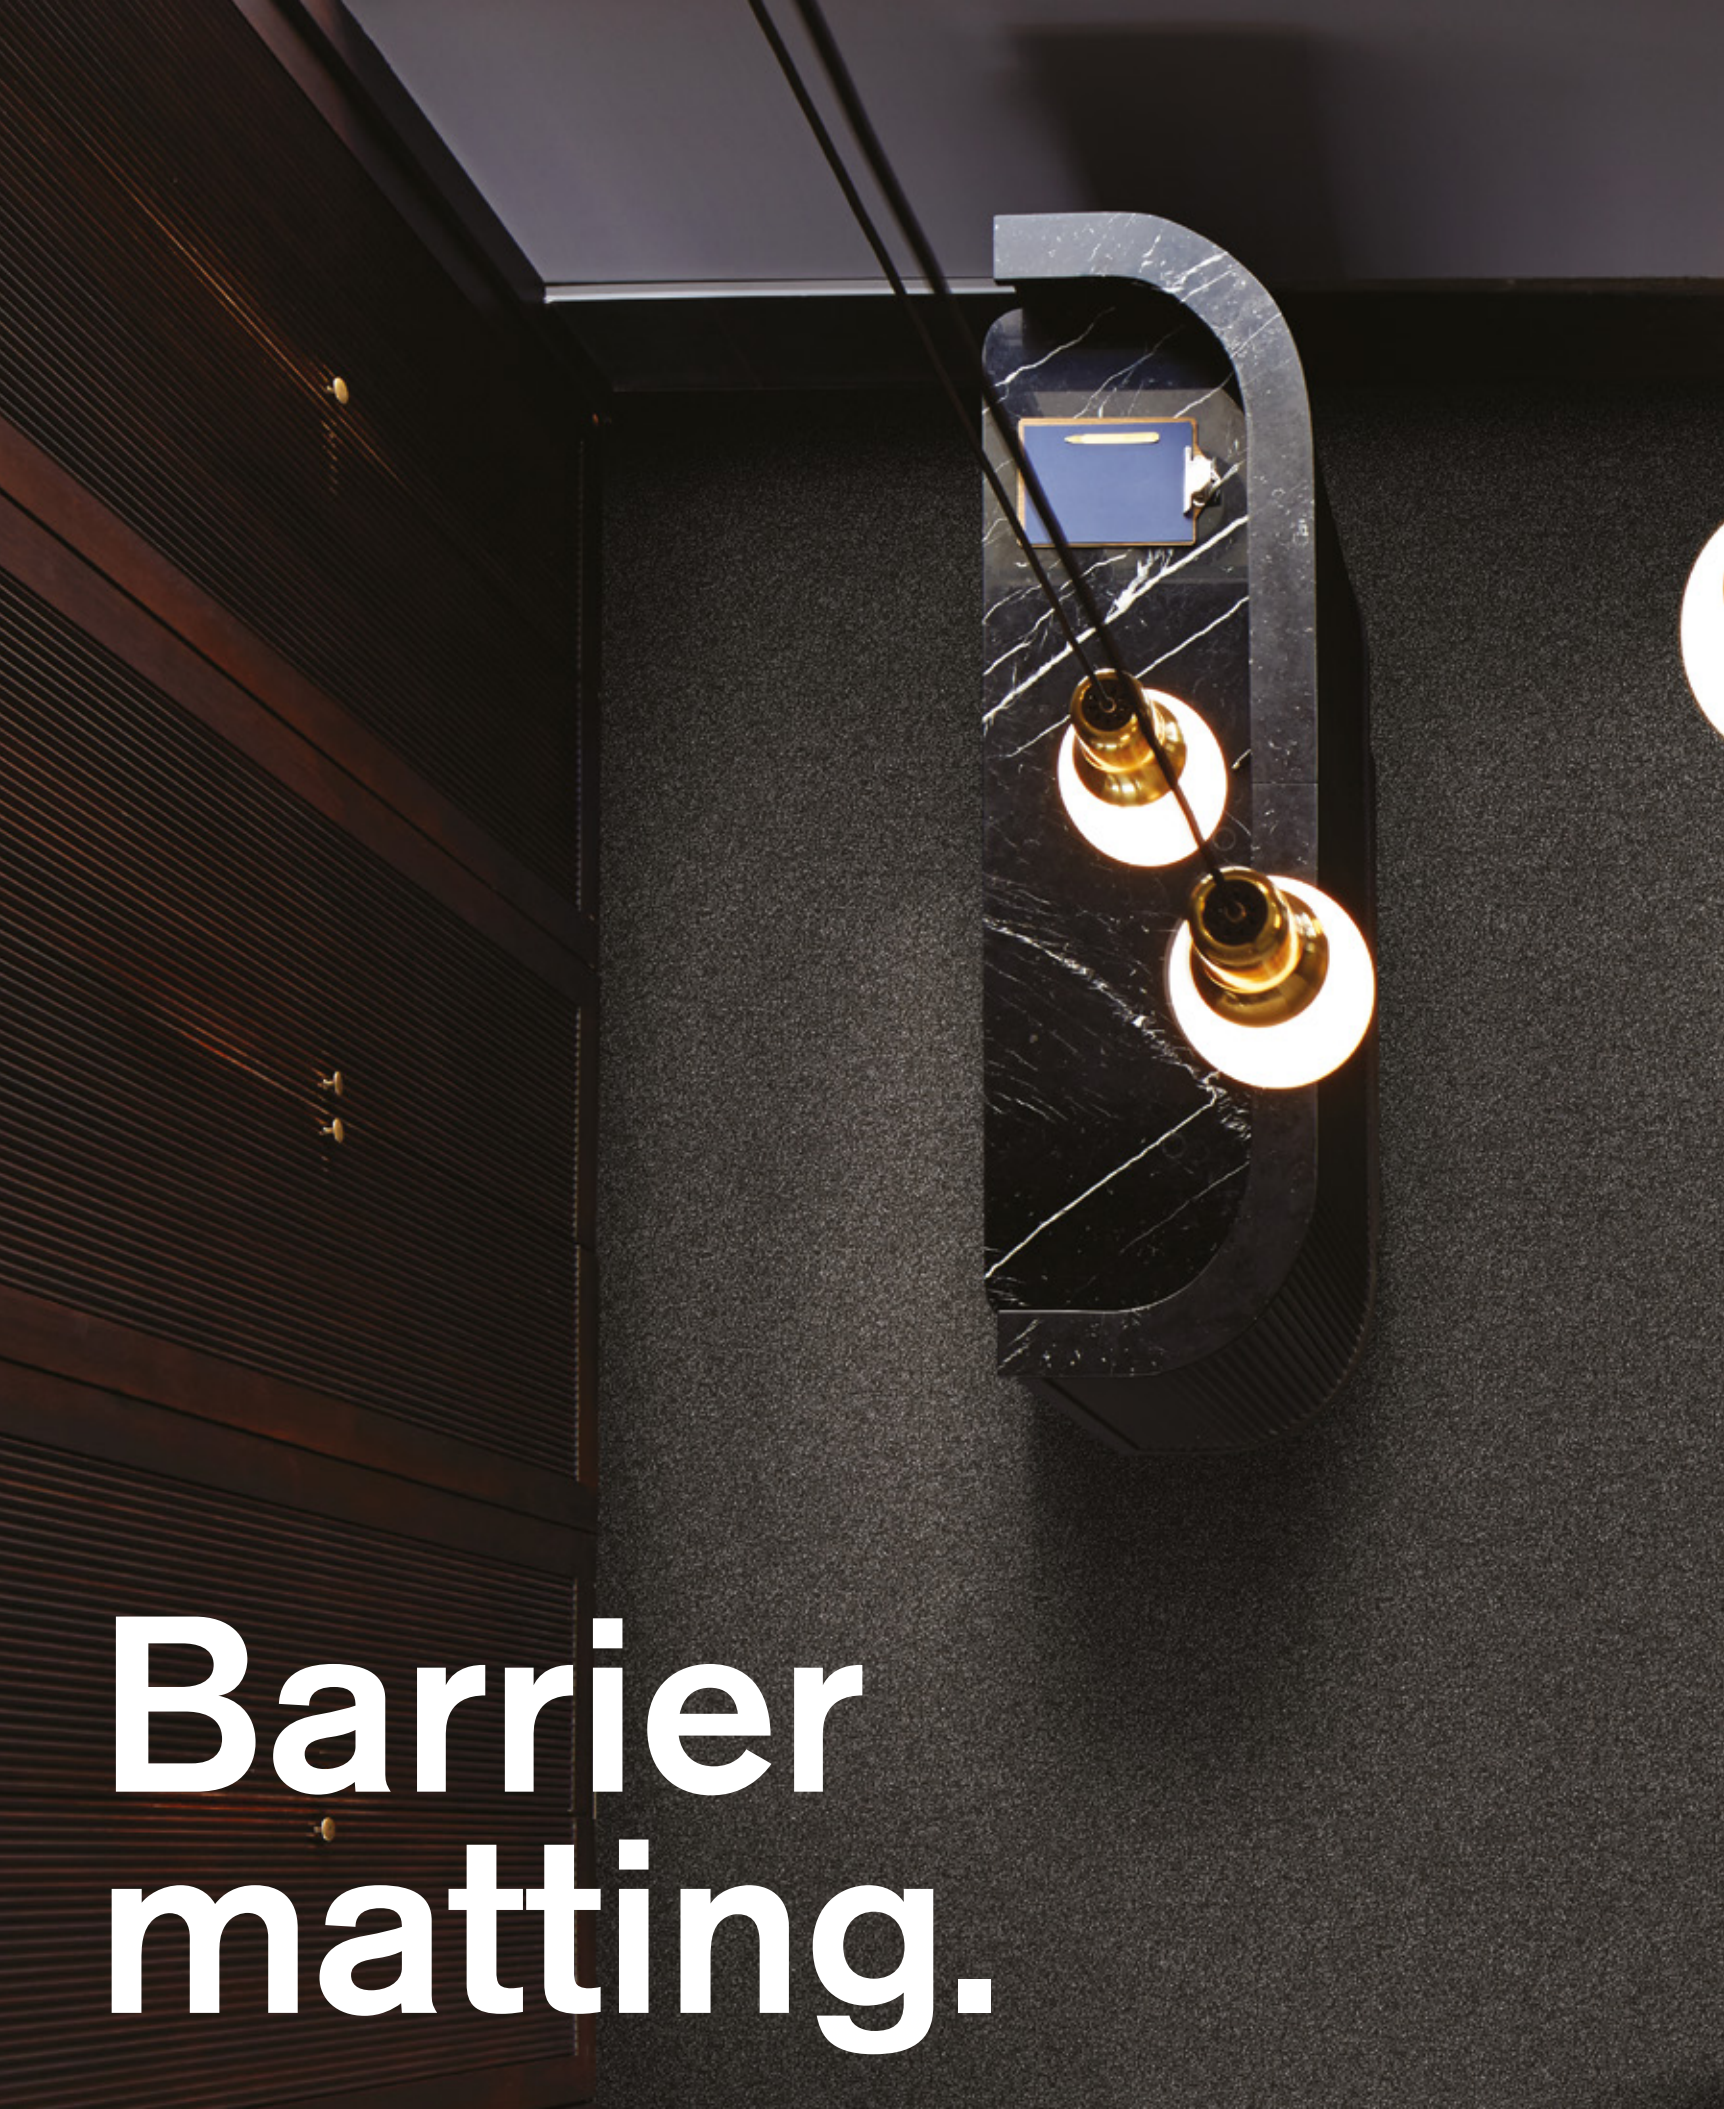

Barrier matting.

BARRICADE TWO - 4200001 GREY
INSTALLED - MONOLITHIC

Barricade One

4118001 GREY

4118002 ANTHRAZITE

4118003 BROWN

Barricade Two

4200001 GREY


4200002 ANTHRAZITE

4200003 BROWN

Barricade One

Backing	Graphlex®
Product Definition	Tufted Patterned Textured Cut Pile
Pile Material	100% Nylon
Pile Yarn Weight	750 g/m^2 ± 5%
Pile Height	4.0 mm + 15% / - 10%
Total Thickness	7.5 mm ± 0.5 mm
Wear Classification	Contract General (EN 1307:32) Class 32 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1)
Castor Chair	≥ 2.0 (EN 985)
Indoor Air Quality	GUT PRODIS - 8C4A0D7C
Packaging	4 m^2

Barricade Two

Monolithic

Backing	Graphlex®
Product Definition	Tufted Plain Textured Loop Pile
Pile Material	100% Recycled Solution Dyed Nylon
Pile Yarn Weight	726 g/m^2 ± 5%
Pile Height	3.6 mm + 15% / - 10%
Total Thickness	6.7 mm ± 0.5 mm
Wear Classification	Contract General (EN 1307:32) Class 32 / LC2
Radiant Panel	(EN ISO 9239-1) Euroclass Cfl s1 (EN 13501-1) *Bfl s1 on request*
Castor Chair	≥ 2.0 (EN 985)
Indoor Air Quality	GUT PRODIS - A0FEC6D0
Packaging	4 m^2

100%
Recycled Nylon

BARRICADE TWO - 4200003 BROWN
INSTALLED - MONOLITHIC

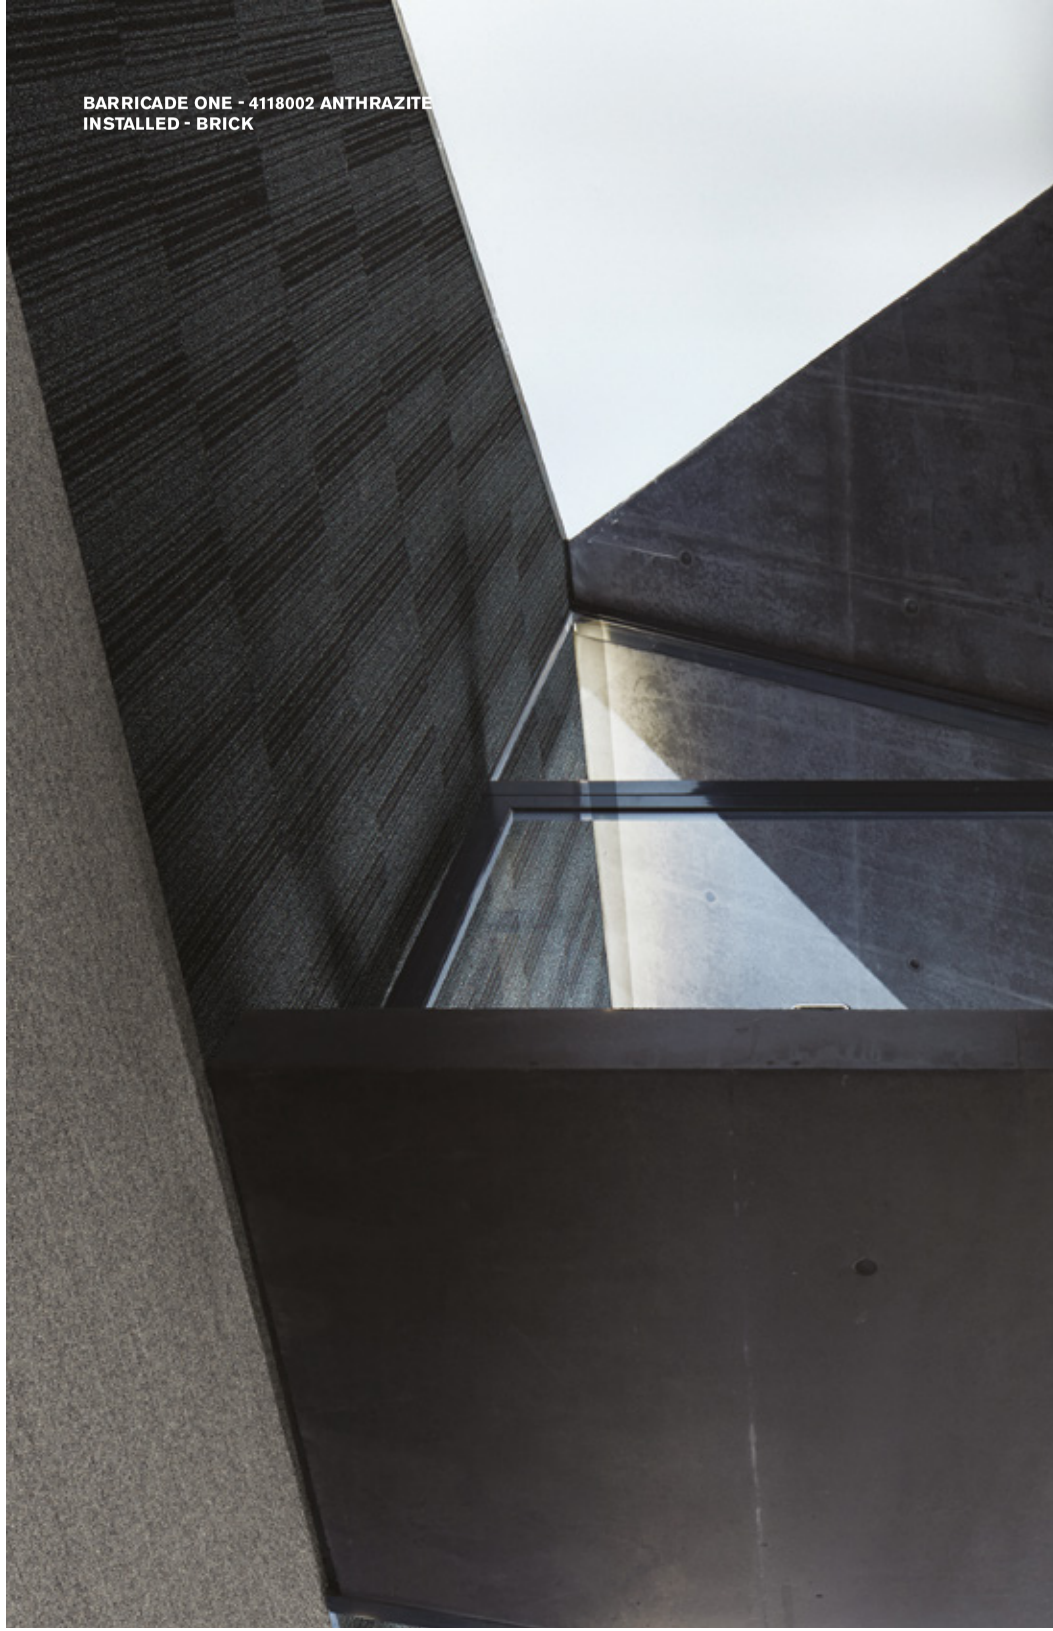

BARRICADE ONE - 4118002 ANTHRAZITE
INSTALLED - BRICK

Index

Product		Page	Tile Size	100% Recycled Nylon
Barricade One		212	50 x 50 cm	
Barricade Two		212	50 x 50 cm	■
Brushed Lines	LVT	14	25 x 100 cm	
Composure		38	50 x 50 cm	
Composure Edge		40	50 x 50 cm	
Conscient		42	50 x 50 cm	
Contemplation		44	50 x 50 cm	
Dolomite		46	50 x 50 cm	
Drawn Lines	LVT	16	25 x 100 cm	
Duet		48	50 x 50 cm	
Elevation III		50	50 x 50 cm	■
Employ Dimensions		52	25 x 100 cm	
Employ Lines		54	50 x 50 cm	
Employ Loop		56	50 x 50 cm	
Equal Measure - EM551		58	25 x 100 cm	■
Equal Measure - EM552		60	25 x 100 cm	■
Equal Measure - EM553		62	25 x 100 cm	■
Equilibrium		64	50 x 50 cm	■
Heuga 530 II		66	50 x 50 cm	■
Heuga 580		68	50 x 50 cm	
Heuga 725		72	50 x 50 cm	■
Heuga 727		74	50 x 50 cm	■
Human Connections - Flagstone		78	50 x 50 cm	■
Human Connections - Kerbstone		78	50 x 50 cm	■
Human Connections - Paver		78	50 x 50 cm	■
Human Connections - Moss		80	50 x 50 cm	■
Human Connections - Moss in Stone		80	50 x 50 cm	■
Human Connections - Rue		82	50 x 50 cm	■
Human Connections - Sett in Stone		80	50 x 50 cm	■
Human Connections - Stone Course		82	50 x 50 cm	■
Human Nature - HN810		84	25 x 100 cm	■
Human Nature - HN820		86	25 x 100 cm	■
Human Nature - HN830		88	25 x 100 cm	■
Human Nature - HN840		90	25 x 100 cm	■
Human Nature - HN850		92	25 x 100 cm	■
Ice Breaker		94	50 x 50 cm	
Level Set Natural Stones	LVT	18	50 x 50 cm	
Level Set Textured Stones	LVT	18	50 x 50 cm	
Level Set Natural Woodgrains	LVT	20	25 x 100 cm	
Level Set Textured Woodgrains	LVT	22	25 x 100 cm	
Look Both Ways - Step Aside		96	50 x 50 cm	
Look Both Ways - Step in Time		98	50 x 50 cm	
Look Both Ways - Step it Up		100	50 x 50 cm	
Look Both Ways - Step this Way		102	50 x 50 cm	
Look Both Ways - Walk About	LVT	24	50 x 50 cm	
Look Both Ways - Walk of Life	LVT	26	50 x 50 cm	
Look Both Ways - Walk on By	LVT	28	50 x 50 cm	
Look Both Ways - Walk the Aisle	LVT	30	50 x 50 cm	
Luxury Living II		104	25 x 100 cm	■
Monochrome		108	50 x 50 cm	■
Native Fabric	LVT	32	50 x 50 cm	
Near & Far - NF400		110	25 x 100 cm	■
Near & Far - NF401		110	25 x 100 cm	■
Net Effect - B601		112	50 x 50 cm	■
Net Effect - B602		112	50 x 50 cm	■
Net Effect - B603		112	50 x 50 cm	■

Product	Page	Tile Size	100% Recycled Nylon
New Horizons II	114	50 x 50 cm	
NY+LON Streets - Broome Street	116	50 x 50 cm	
NY+LON Streets - Dover Street	118	50 x 50 cm	
NY+LON Streets - Mercer Street	120	50 x 50 cm	
NY+LON Streets - Old Street	122	50 x 50 cm	
NY+LON Streets - Reade Street	124	50 x 50 cm	
NY+LON Streets - Wheler Street	126	50 x 50 cm	
Off Line	128	25 x 100 cm	■
On Line	130	25 x 100 cm	■
Polichrome Solid	132	50 x 50 cm	■
Polichrome Stipple	134	50 x 50 cm	■
Radial	136	50 x 50 cm	
Straightforward II	138	50 x 50 cm	
Studio Set LVT	34	25 x 100cm	
Superflor	140	50 x 50 cm	
The Scandinavian Collection	142	50 x 50 cm	
Touch & Tones 101	144	50 x 50 cm	■
Touch & Tones 102	146	50 x 50 cm	■
Touch & Tones 103	148	50 x 50 cm	
Touch of Timber	150	25 x 100 cm	■
Transformation	152	50 x 50 cm	
Twist & Shine Micro	154	50 x 50 cm	■
Unity	156	50 x 50 cm	
Urban Retreat - UR101	158	50 x 50 cm	■
Urban Retreat - UR102	158	50 x 50 cm	■
Urban Retreat - UR103	158	50 x 50 cm	■
Urban Retreat - UR202	160	50 x 50 cm	■
Urban Retreat - UR301	160	50 x 50 cm	■
Urban Retreat - UR303	160	50 x 50 cm	■
Urban Retreat - UR501	162	25 x 100 cm	■
Visual Code - Circuit Board	164	25 x 100 cm	■
Visual Code - Darning	166	25 x 100 cm	■
Visual Code - Decibel	166	25 x 100 cm	■
Visual Code - Haptic	166	25 x 100 cm	■
Visual Code - Hard Drive	168	25 x 100 cm	■
Visual Code - Overedge	166	25 x 100 cm	■
Visual Code - Plain Stitch	170	25 x 100 cm	■
Visual Code - Static Lines	172	25 x 100 cm	■
Visual Code - Stitch Count	174	25 x 100 cm	■
Visual Code - Stitchery	176	25 x 100 cm	■
Works - Balance	178	25 x 100 cm	
Works - Dash	180	50 x 50 cm	
Works - Flow	182	50 x 50 cm	
Works - Fluid	184	25 x 100 cm	
Works - Freestyle	186	25 x 100 cm	
Works - Geometry	188	50 x 50 cm	
Works - Hype	190	50 x 50 cm	
World Woven WW860	192	25 x 100 cm	■
World Woven WW865	194	25 x 100 cm	■
World Woven WW870	196	25 x 100 cm	■
World Woven WW880	198	25 x 100 cm	■
World Woven WW890	200	25 x 100 cm	■
World Woven WW895	202	25 x 100 cm	■
Yuton 104	204	50 x 50 cm	
Yuton 105	206	50 x 50 cm	
Yuton 106	208	50 x 50 cm	

The Workbook 20/21 is printed on **recycled paper**.

By using carbon balanced paper for the Workbook 20/21 we have balanced through World Land Trust™ the equivalent of **11,424kg of carbon dioxide**. This support will enable World Land Trust to protect **7,996m² of critically threatened tropical forest.**

WORLD LAND TRUST™

www.carbonbalancedpaper.com
CBP003294

All the pictures in Workbook 20/21 are represented as accurately as the printing process will allow.
Please order a sample tile to check the exact colour of our product before ordering.

Interface European Manufacturing BV reserve the right to change or modify specifications.
Please see website for latest specifications.

GET IN TOUCH

Europe, Middle East & Africa

AE	+971 (0)4 8189077	NL	+31 33 277 5555
AT	+43 1 8102839	ME	+381 11 414 92 00
BA	+387 33 522 534	MK	+389 2 323 01 89
BE	+32 2 475 27 27	NO	+47 23 12 01 70
BG	+359 2 808 303	PL	+48 500 151 101
BY	+375 17 226 75 14	PT	+351 217 122 740
CH	+41 44 913 68 00	RO	+40 21 317 12
CZ	+42 0 233 087 111		40/42/43/44
DE	+49 2151 3718 0	RS	+381 11 414 92 00
DK	+45 33 79 70 55	RU	+7 495 234 57 27
ES	+34 932 418 750	SA	+966 554622263
EG	+(202) 3760 7818	SE	08-241 230
FR	+33 1 58 10 20 20	SK	+421 911 104 073
GR	+30 211 2120820	SI	+386 1 520 0500
HR	+385 14 62 30 63		+386 8 20 54 007
HU	+36 1 349 6545	TR	+90 212 365 5506
IE	+353 1 679 8466	UA	+38(044)238 27 67
IL	+972 546602102	UK	+44 (0)800 3134465
IT	+39 02 890 93678	ZA	+27 11 6083324
KZ	+7 495 234 57 27		

www.interface.com

CLIMATE TAKE BACK™

Climate change is undeniable. And reversible. Our mission is to prove it. **Join the #ClimateTakeBack and help create a climate fit for life.**

BROMIXDENA047 10/2020